



Electrical specifications

Passband: 920-928 MHz
Insertion loss (CF): ≤ 1.5 dB
Insertion loss (all passband): ≤ 3 dB
Return loss: 16 dB
Out of band rejection : 75 dB@30 MHz Bw
Power Handling: 20 Watts


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N Female
Dimensions: 140 X 80 X 53 mm

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

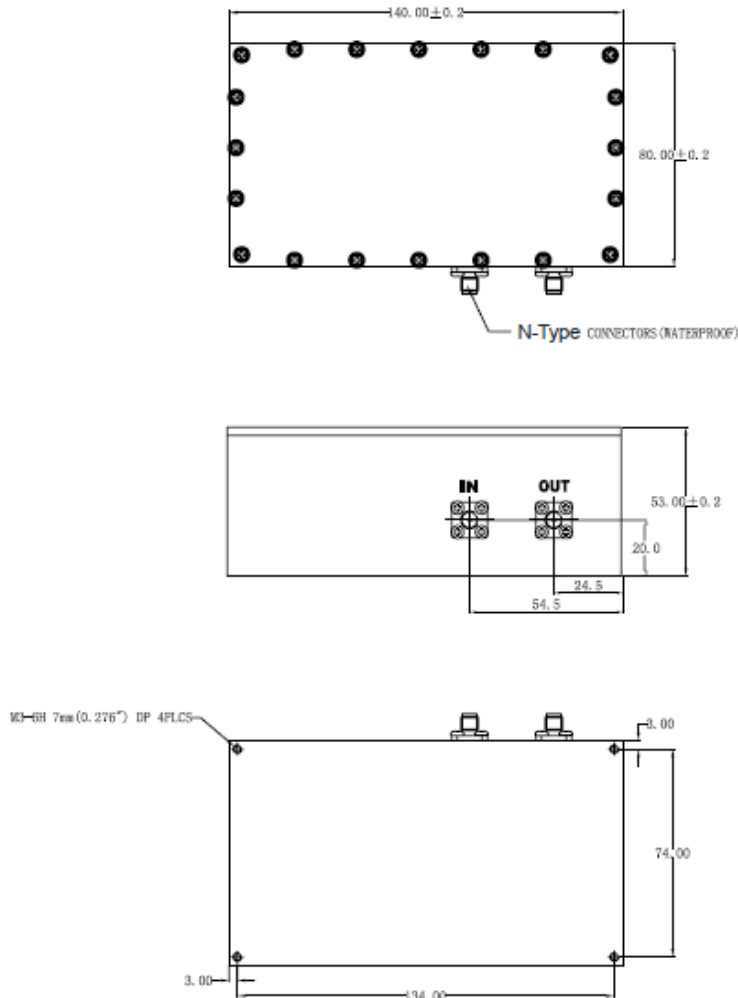



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

925 MHz Cavity Bandpass Filter

Part Number: AB924B750



Plot:

