



FIG 2
POLYIMIDE PAD
ADF6-30-03.5-XXX-4-X-XR SHOWN
(SOME CENTER FEATURES REMOVED FOR CLARITY)

1	IABLE 3		
ſ	-No OF		
	POS IN	"G"	
	ROW		
ſ	10 POS	3.03	[0.119]
ſ	20 POS	6.21	[0.244]
ſ	30 POS	9.38	[0.369]
	40 POS	12.56	[0.494]
	50 POS	15.73	[0.619]
	60 POS	18.91	[0.744]
	70 POS	22.08	[0.869]
ſ	80 POS	25.26	[0.994]
	90 POS	28.43	[1.119]
	100 POS	31.61	[1.244]
-			


TABLE 2


TABLE 8			
LEADSTYLE	"N"		
-03.5	3.86 [0.152]		
-07.5	7.86 [0.309]		

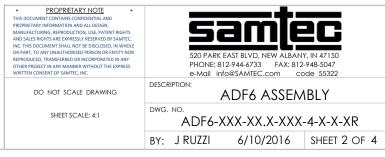


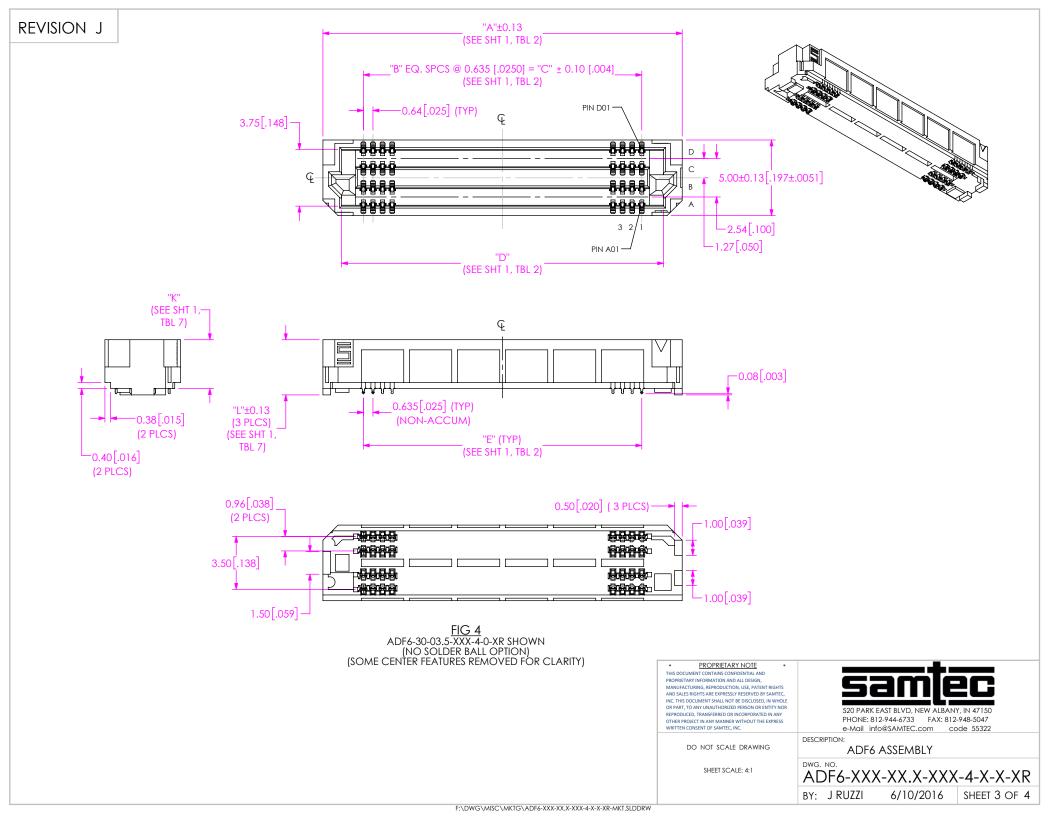

## **REVISION J**

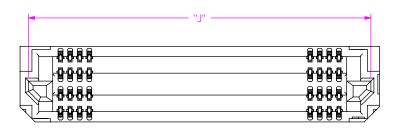

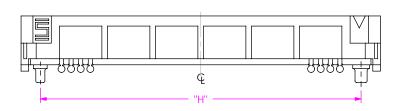

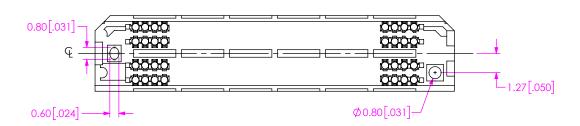




TABLE 5			
No OF POS PER ROW	"H"		
-10	8.52 [0.335]		
-20	14.87 [0.585]		
-30	21.22 [0.835]		
-40	27.57 [1.085]		
-50	33.92 [1.335]		
-60	40.27 [1.585]		
-70	46.62 [1.835]		
-80	52.97 [2.085]		
-90	59.32 [2.335]		
-100	65.67 [2.585]		

TABLE 6			
No OF POS PER ROW	"J"		
-10	9.945 [0.3915]		
-20	16.295 [0.6415]		
-30	22.645 [0.8915]		
-40	28.995 [1.1415]		
-50	35.345 [1.3915]		
-60	41.695 [1.6415]		
-70	48.045 [1.8915]		
-80	54.395 [2.1415]		
-90	60.745 [2.3915]		
-100	67.095 [2.6415]		

FIG 3
-A: ALIGNMENT PIN
ADF6-30-03.5-XXX-4-X-A-XR SHOWN
(SAME AS FIG 1, EXCEPT AS SHOWN)
(SOME CENTER FEATURES REMOVED FOR CLARITY)

