THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

ITEM	CONNECTOR PART NO.	DESCRIPTION	IPI CHECK	EOR CHECK	Applicable Tooling
1	See Table 1	XAF CONNECTOR			BCD
2	UL10002, 22 AWG	BLACK			

TABLE 1

ITEM	NUMBER OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NUMBER	TOTAL WIRE REQUIRED
1	2	02XAF-2S	A02XAF02XAF22K305B	609.6
1	3	03XAF-2S	A03XAF03XAF22K305B	914.4
1	4	04XAF-2S	A04XAF04XAF22K305B	1,219.2
1	5	05XAF-2S	A05XAF05XAF22K305B	1,524.0
1	6	06XAF-2S	A06XAF06XAF22K305B	1,828.8
1	8	08XAF-2S	A08XAF08XAF22K305B	2,438.4
1	10	10XAF-2S	A10XAF10XAF22K305B	3,048.0
1	20	20XAF-2S	A20XAF20XAF22K305B	6,096.0

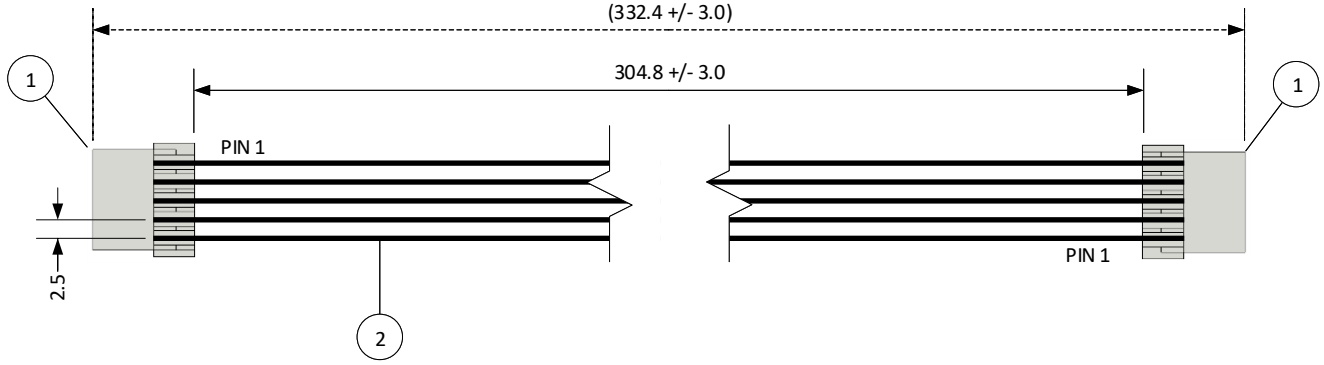

Electrical Specifications

Current: 3.0A AC/DC

Voltage: 150V AC/DC

REV.	DESCRIPTION	DATE	BY
1	Add electrical specifications	6/27/2018	SP

SCALE: 1: 1

DIMENSIONS: All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.

DRAWN BY: STEVEN PILKINGTON

CHECKED BY: JUSTIN BAKER

CUSTOMER NAME:

CUSTOMER PART NO.:

DESCRIPTION: 2.5 mm Pitch XAF Standard Catalog Assembly - 12" Overall Length – Pin out: 1 to N

ASSEMBLY PART NO.: SEE TABLE 1

DRAWING NO. & REVISION: GAM-042

REVISED: 3/7/2016