


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
BD	35				F	REDRAWN AND REV PER ECN BD4183	8-20-90	KB
					G	OBS -2 PER EC 0020-1305-95	16 MAY 96	RB

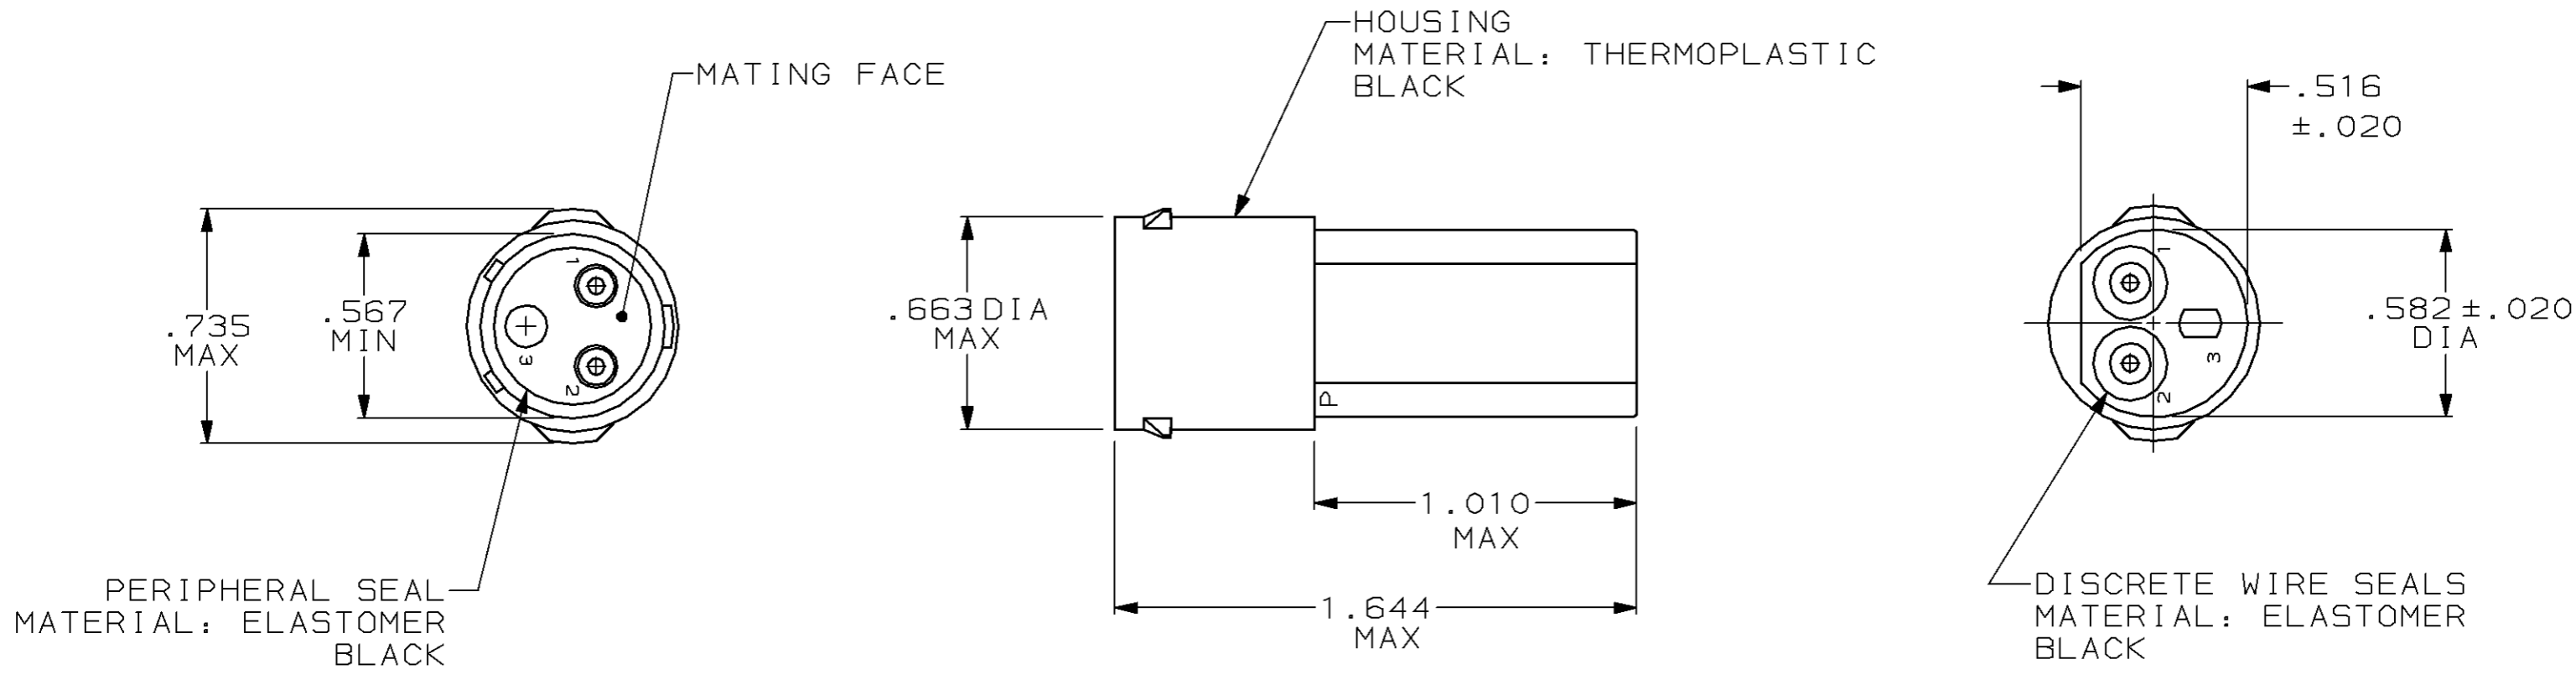

OBSOLETE	NO	207846-2
	YES	207846-1
	SEALS	PART NUMBER

1. WIRE INSULATION SEALING RANGE .070-.130 DIA.
2. THIN MEMBRANE PERMISSIBLE ON SMALL DIAMETER OF WIRE SEALS.
3. ROTATION OF CAVITY CIRCUIT KEY FROM PART TO PART IS PERMISSIBLE.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 8-20-90 J GALLUCCI BG	AMP AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK 1-4-91 J MCCLINTON			
	MATERIAL SEE CALLOUT	APPD 1-18-91 K BEAVER	NAME RECEPTACLE, 2 POSITION, STANDARD ECONOSEAL CONNECTOR	
	FINISH -	APPD 1-29-91 J FULPONI	SIZE B	FSCM NO 00779
	PRODUCT SPEC -	SCALE 2:1	SHEET 1 OF 1	
	APPLICATION SPEC -			
	WEIGHT -			