

	т	D D	г	<b>—</b>		
					_	



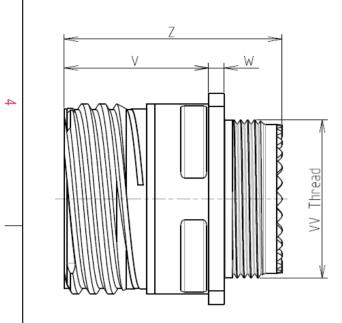

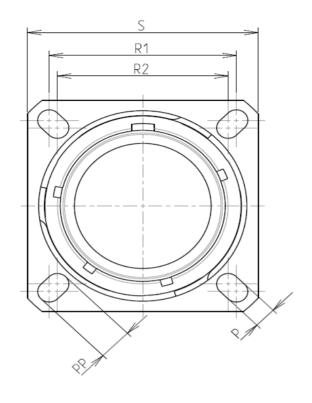

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	-65°C to +175°C				
-Salt Spray	: 500 hours				

: 12.01 g ± 10%

8D 0

G

11

Ζ


01

Ρ

F

D

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

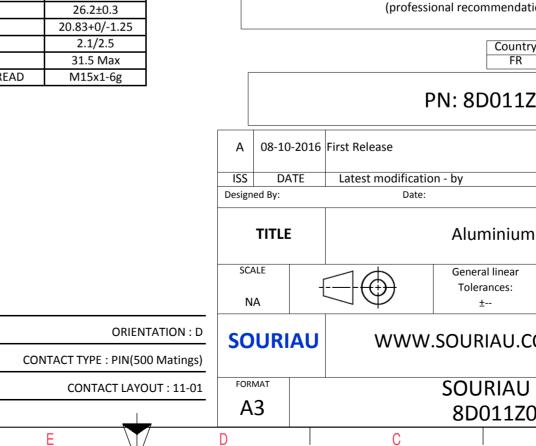

0		Φ		⊳			
•							
		The second					
		0					
1							
			1				
					3		
LAY	OUT SHOWN AS EXA	MPLE			0		
SOURIAU shall not be liable for any non-conformity or damage							
due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party							
	onal recommendatio						
	Country	Juriso	diction & Control List		2		
FR Not Listed							
PN: 8D011Z01PD							
					-		
First Release							
Latest modificatio Date:	n - by		CUSTOMER DRAWI	MOD N°			
Aluminium Receptacle 8D series							
$\neg \phi$	General linear		NPRDS / PROJECT	Г	-		
$\exists \Psi$	Tolerances: ±		859		1		
WWW.SOURIAU.COM   This document is the property of SOURIAU     it must not be reproduced or							
VV VV VV.SOURIAU.COIVI it must not be reproduced or communicated without permission							
SOURIAU DRG N° SHEET							
	8D011Z02	LPD-C	I	1/2			
С		В		А			

		۵	н Г	m		0
		Contact Layout				Panel Cutou
4		01			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y			¥ ~~~~	ØT_
w	A	0 0	]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either or (professional recommendat
N						Countr FR
					A 08-10-20 ISS DATE Designed By:	PN: 8D0112 16 First Release Latest modification - by Date:
					SCALE	General linear Tolerances:
<b>→</b>					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011Z0
	Н	G	F	E	D	C

