
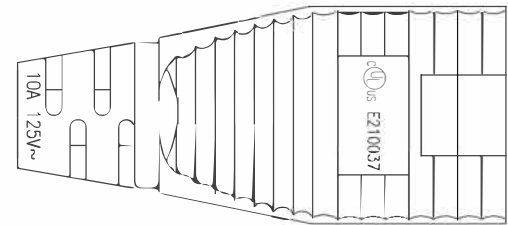
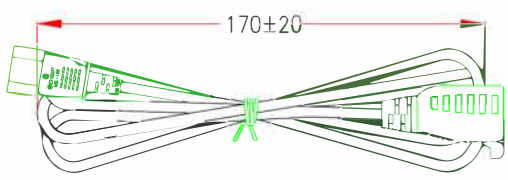


P1: M-004

P2: M-007

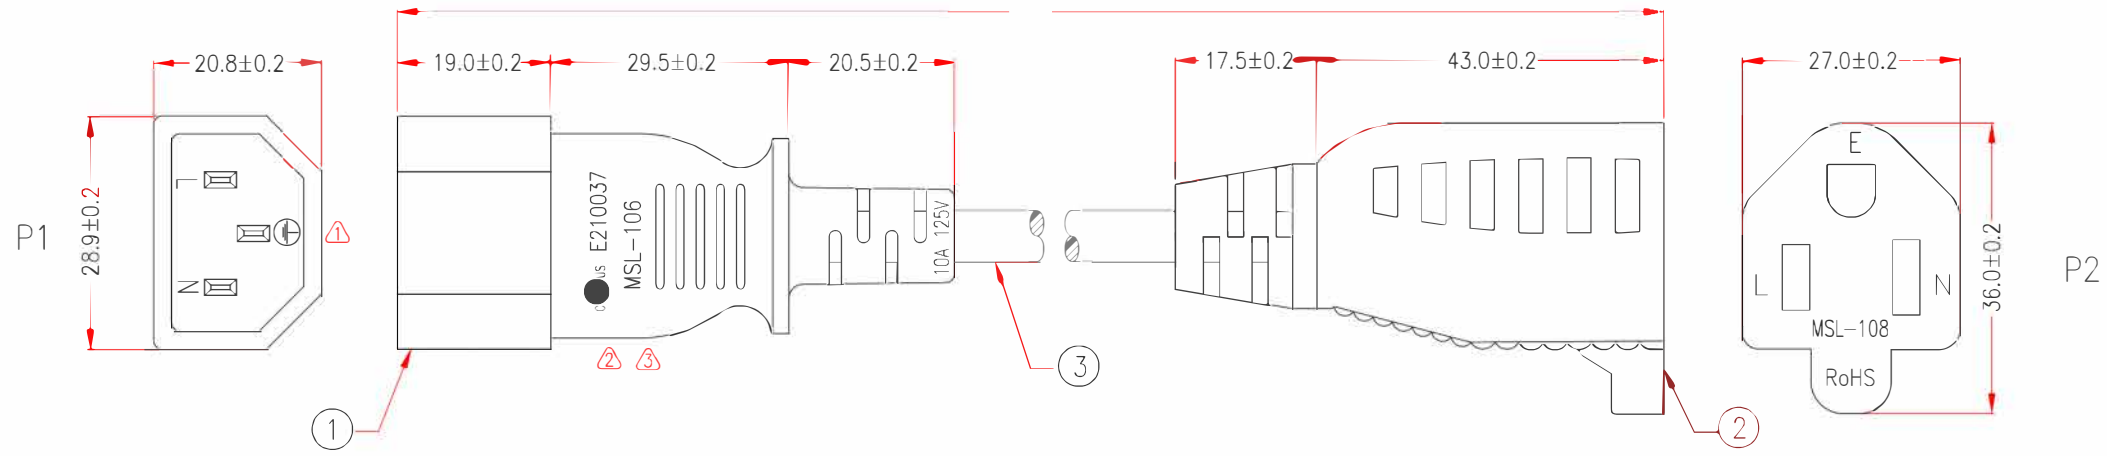

P1,P2: cULus E210037

\*NOTE: ALL relevant materials are complied with RoHS directive  
THE MARKING IS PROTRUDING LETTERING MOULD

MARKING:

(UL) SVT 3/C 18AWG(0.824MM<sup>2</sup>) VW-1 75°C 300V E204978 CSA SVT 3/C 0.824MM<sup>2</sup>(18AWG) FT2 60°C 300V 204790 MSL

P1	P2
L _____ L	BLACK
N _____ N	WHITE
E _____ E	GREEN

3	UL SVT 18AWG*3C OD 6.3mm, JACKET BLACK, DRAWING No. EPSVT011803C-099	H5TB10-0304K09	875mm	M304
2	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09		M304
	BRACKET: YS-016	A1QC15-0767	1	M767
	TERMINAL: 98575BS-0	A1QB09-0257	1	M257
1	TERMINAL: 98752BS-0	A1QB11-0257	2	M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-014	A1QC10-0767	1	M767
	TERMINAL: 2*4mm 98672BS-1	A1QB07-0257	3	M257
No.			Q'TY	Supplier

APPROVED					Unless Otherwise SPEC. Tolerances: .0 ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	17/AUG/17	DRAWN NAME	POWER SUPPLY CORDS & SETS	
DRAWING	ZHU	17/AUG/17	PRODUCT NO	PWCD-515RC14-10A-XXF-BLK	
					UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm