


11A8GD (DC ~ 8GHz)

Construction

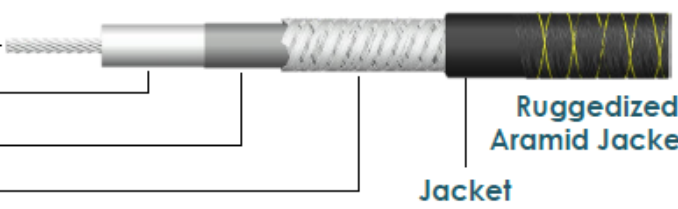

Part	Material	Diameter	
1	Center Conductor	Silver Plated Copper [Solid]	Φ 1.12 [mm] Φ 0.044 [inch]
2	Dielectric	Aeroflon® [Extruded]	
3	1 st / 2 nd Shield	Mylar tape & Copper wire	
4	Jacket	Ruggedized Aramid Yarn	Φ 5.80 \pm 0.1 [mm] Φ 0.228 \pm 0.003 [inch]

Electrical & Mechanical specification

Characteristic Impedance	50 \pm 1 Ω
Operating Frequency	DC to 8 GHz
Temperature	-50 $^{\circ}$ C ~ +135 $^{\circ}$ C
Velocity of Propagation	77% nominal
Minimum Bend Radius	25 mm / 0.98 inch
Weight [g/m]	54
Shielding Effectiveness	<-100 dB
Phase Stability vs. Flexure	2 $^{\circ}$ max. @8GHz
Loss Stability vs. Flexure	Δ 0.05dB to 8GHz
Available Connector	SMA / N

Connector 1	SMAFST
Connector 2	SMAFST
Insertion Loss Typ. (@ Max Freq.)	1.27 dB/m
Insertion Loss Guarantee (@ Max Freq.)	1.38 dB/m

Microwave Cable

DC ~ 8GHz phase stable cable