
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES	
1	50-00152	Connector, dc jack, 5.5x2.1xH6.5xL19.5 mm, molding style	1		
2	30-00689	Wire, 2C TS, 22 AWG, UL2464, 300V, 80C, 4.3 mm, VW-1, PVC	1		
3	24-00256	Overmold, dc jack, 5.5 mm, twist lock panel mount, TIC	1	black	
4	56-00001	Hardware, washer, lock, 14x11.1x1.1 mm, SPCC, nickel plated	1		
5	56-00000	Hardware, nut, hex, 13x2.5 mm, M11x1.0, brass, nickel plated	1		

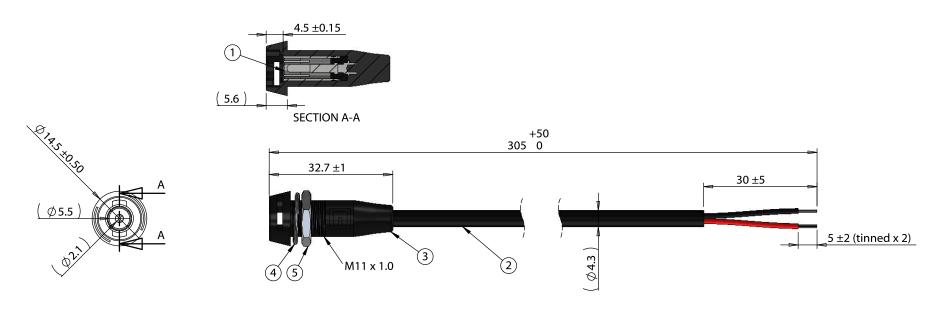


Installation Details

Panel thickness: 1.5 - 4.5 mm Recommended Panel cutout:

Notes: Designed to mate with cable assembly: 10-02931

Functionally equivalent components may be substituted



Wiring Diagram						
50-00152	wire color					
center	red					
sleeve	black					

Revision:	Date:	Description:	Prepared:	Notes:						
Α	9/19/2018	Initial release	JP Digitally signed by JP Directal 809.21 133601-67009	RoHS compliant		TENSILITY				
			Verified: AW Digitally signed by AW Date: 2018.09.21 16:13:41	intermittent	te	1 1.541.323.3228 800 877.670.7118 x 1.541.323.4202 web tensility.com				
			Dimensions are in		10.					
			- millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	± 0.5 mm ± 0.3 mm Cable, 305 mm, 5.5x2.1 mm 50-00152 dc jack twist lock panel mount to 5 mm tinned, 22 AWG	Size:	Part number: 10-02978				
					Scale:	1:1 Sheet 1 of 1				

3 2