

DIMENSIONS


SIZE		A ^{±1.20} _{±0.047}	B ^{±1.20} _{±0.047}	C ^{±0.80} _{±0.031}	D ^{±0.80} _{±0.031}	E ^{±0.80} _{±0.031}	F ^{±0.80} _{±0.031}	G ^{±0.80} _{±0.031}
9	mm	15.00	30.80	15.00	24.40	50.80	18.00	26.20
	in.	0.59	1.21	0.59	0.96	2.00	0.71	1.03
25	mm	15.80	53.30	23.10	34.50	72.40	24.30	36.60
	in.	0.62	2.10	0.91	1.36	2.85	0.96	1.44

BACKSHELL KIT INCLUDES:

- (2) BACKSHELL HALVES
- (3) HOUSING SCREWS
- (1) 4-40 LONG FLAT HEAD SCREW
- (1) 4-40 SHORT FLAT HEAD SCREW
- (1) SET OF COMPRESSION INSERTS-VARIOUS SIZES (SEE DIAGRAM BELOW)

BACKSHELL MATERIAL: DIE CAST ZINC ALLOY, NICKEL PLATED
 4-40 FLAT HEAD SCREWS: STEEL, ZINC PLATED
 HOUSING SCREWS: STEEL, ZINC PLATED
 COMPRESSION INSERT: ABS, UL RECOGNIZED
 OPERATING TEMP: -40°C TO +120°C

COMPRESSION INSERTS

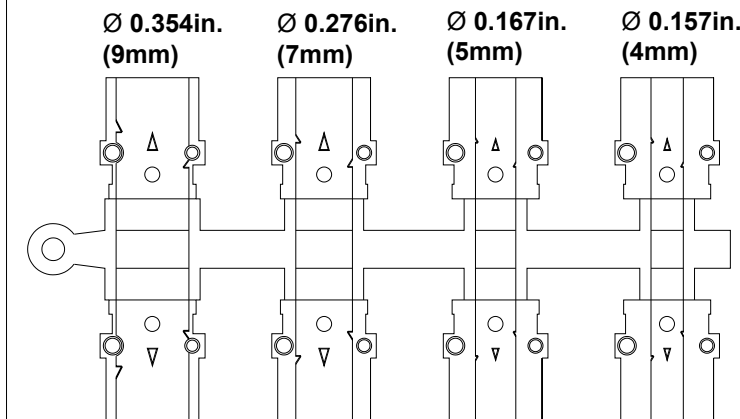

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
B. BRIDGES

DATE:
02/14/2018

UNITS = "AS SPECIFIED" DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS SHEET 1 OF 1 REV 2

DWG NO. 962-YYY-030R121