


NUMBER C-160765

DRAWING MADE IN AMERICAN PROJECTION

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
D2	REVISED PER ECR-14-017789	27NOV2014	NK	DC


CHAMFER AROUND FRDNT OF RECEPTACLE.



FOR .020 (0.5) TAB-THICKNESS


.020 MAX (0.5)

.020 MAX (0.5)

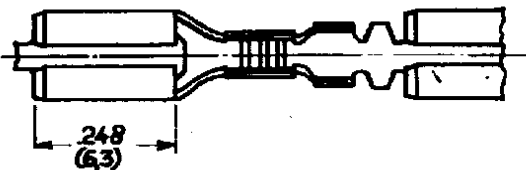

4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

5 OBSOLETE

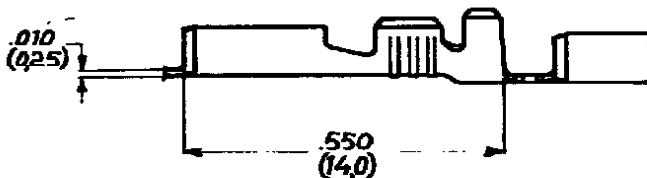

NOTES:

1 FOR STANDARD AND MINIATURE APPLICATORS.

2 FOR MINIATURE APPLICATORS (AMP-D-MATOR APPLICATION)

3 REELED WITH PAPER LAYER.

INCHES DIMENSIONS IN (MM) DO NOT SCALE PRINT

160765-6	5	4	PH. BRONZE	TIN
160765-5	2		PH. BRONZE	TIN
160765-4	1		PH. BRONZE	
160765-3	2		BRASS	TIN
160765-1	1		BRASS	
ORDER NO	MATERIAL	PLATING		
DR. R.W.M.B. 28.2.77	DATE	BY D. SINISI 28.2.77	DATE	
CHK. [Signature]	DATE 28.2.77	APP. KK	DATE 25/09/09	

CUSTOMER COPY FOR REFERENCE ONLY



WIRE RANGE 22-28 AWG 0.18-0.33mm	DIA. RANGE 0.40-0.60 DIA. (1.0-2.0)	FIRST USED	
SCALE 4=1	LOC H	SIZE A	REV D2
NAME C-160765			
110 Ser. FASTON RECEPTACLE			