


REV. 1
DCO 170528

COIL: @ 25°C
RESISTANCE 1000 OHMS ± 10%
NOMINAL VOLTAGE 13.0 mADC
MUST OPERATE 6.5 mADC
MUST RELEASE 3.1 mADC MAX 0.65 mADC MIN

ENVIRONMENT:
VIBRATION 10 CPS TO 2000 CPS @ 15 g's
SHOCK 100 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES:
OPERATE TIME 15 MS MAX.
RELEASE TIME 10 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

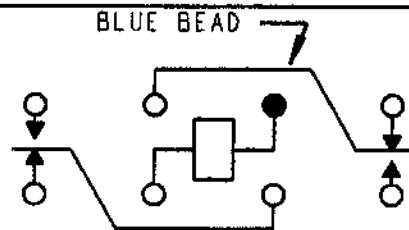

TERMINAL VIEW

CONTACT RATING:
LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. PBB 12/6/00 CK. TLG 7-18-01

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-137 REV.

3SAT RELAY

3SAT1354A2