
т	۵	н п	m	0





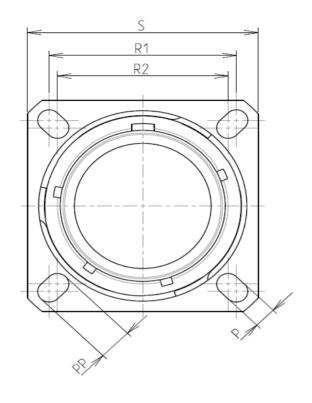

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Mat	terial	: Aluminium			
-Shell Plat	ing	: Black Zinc Nickel			
-Insulator		: Thermoplastic			
-Contacts		: Copper Alloy			
-Seals & G	irommet	: Silicon Elastomer			
-Contact F	Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	ý	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories					
-Tempera	ture Range	: -65°C to +175°C			

: 500 hours

: 14.18 g ± 10%

8D 0

G

11

Ζ

02

S

F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : B

CONTACT LAYOUT : 11-02

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

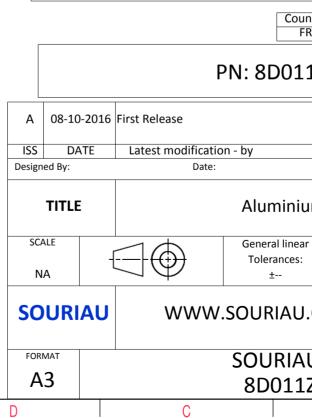

	Φ		A		
					4
AS EXA	AMPLE				3
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)					
untry FR	Jurisd	liction & Cor Not Listed			2
.1Z02SB					
				MOD N°	
um	customer drawing um Receptacle 8D series				
ar		NPRDS	/ PROJECT		
			859		1
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	U DRG N° SHEET				
.Z0	2SB-C B		A	1/2	J
	0	1	Λ		

ſ	T	G	TT I	m	D	0
		Contact Layout				Panel Cutou
4	.0. (2)	+Y IB IA +Y +X 95 -Y .095 (2.4imm)			Σ -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Com posit ID A B Shell Arrangement size no. 11 -2	Join (mm) X-axis (mm) Y-axis (mm) + .095 (2.41) + .000 (.00) 095 (2.41) + .000 (.00)	ct n		<u>_</u> (Dim
ى ت						ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat
S						PN: 8D0112
					A 08-10-201 ISS DATE Designed By:	L6 First Release Latest modification - by Date:
→					SCALE NA	General linear Tolerances:
					FORMAT	J WWW.SOURIAU.C SOURIAU
	Н	G	F	E	A3 D	8D011Z0
				N	V	

