

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



© COPYRIGHT 19 BY -

ALL RIGHTS RESERVED.

creo
 Creo Parametric 2.0
**DO NOT REVISE
 EXCEPT BY CAD**

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REDRAW BY CAD W/O CHANGE EC 435/99	29SEP99	MLO	PLF
	B1	REVISED BY ECO-18-001641	25FEB2021	PSB	DAO

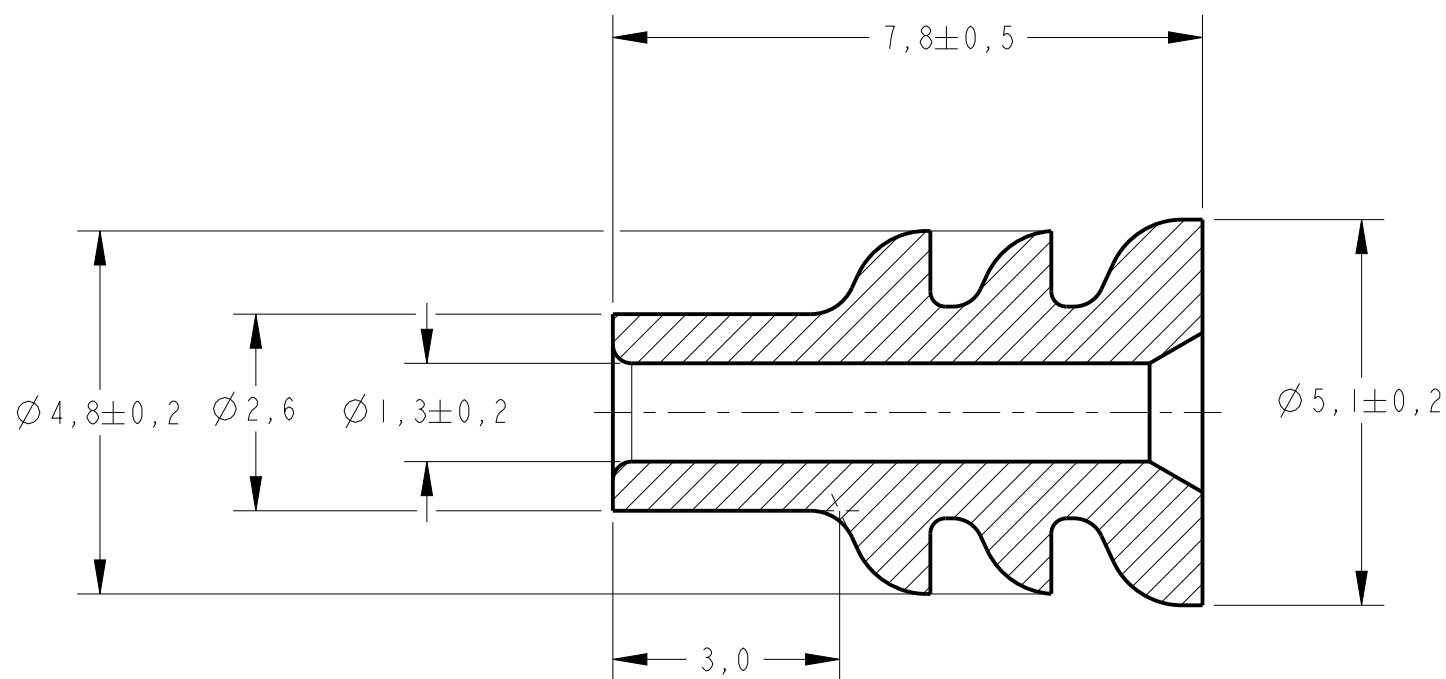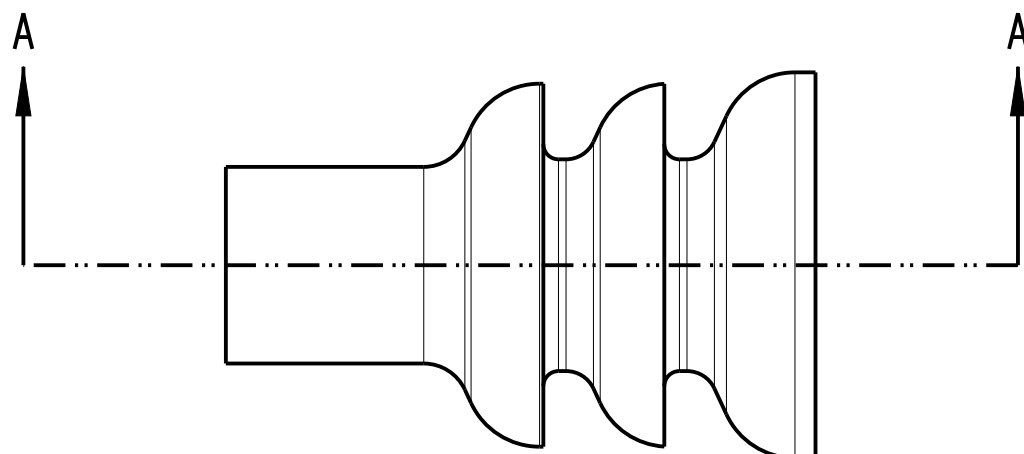

NOTAS:

1- FAIXA CONDUTOR: 0,5-1,5mm²
 FAIXA DO DIAMETRO ISOLANTE: 1,4-2,4mm.

1 - WIRE RANGE: 0,5-1,5mm²
 INSULATION DIAMETER RANGE: 1,4-2,4mm.

—	MARROM AVERMELHADO REDDISH BROWN	SILICONE	444430-1
RAW MAT'L NO	FINISH	MATERIAL	PART NUMBER

SECTION A-A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.L. OGAWA 02SEP99	STE TE Connectivity	
DIMENSIONS: mm		CHK P.L. FARIA 29SEP99		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD I.G. DALTO 31JAN00	NAME SINGLE WIRE SEAL	
0 PLC ±-		PRODUCT SPEC	-	
1 PLC ±0,3		APPLICATION SPEC	-	
2 PLC ±0,2		WEIGHT	-	
3 PLC ±-		Customer Drawing	SIZE A3	CAGE CODE -
4 PLC ±-			DRAWING NO C-444430	RESTRICTED TO -
ANGLES ±°			SCALE 10:1	SHEET 1 OF 1
MATERIAL SEE TABLE	FINISH SEE TABLE			REV B1