

Ŧ	۵	г	m	0



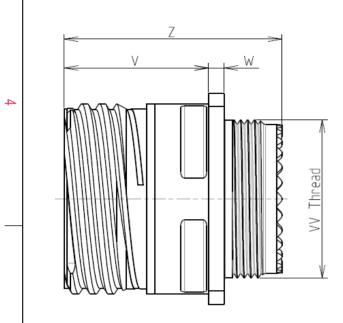



Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

8D 0

13


W


03

В

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

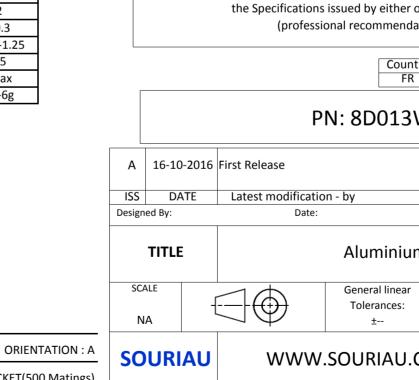

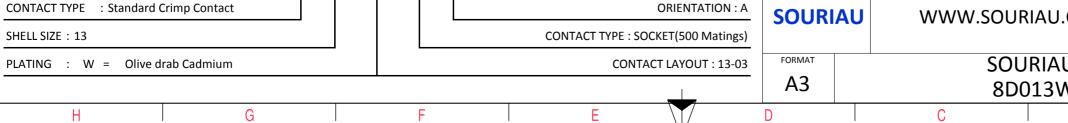

C							
					4		
LAYOUT SHOWN AS EXAMPLE							
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)							
PN: 8D013W03BA							
rst Release							
Latest modification - by Date: CUSTOMER DRAWING				MOD N°			
Aluminium Receptacle 8D series							
$] \bigoplus$	General linear Tolerances: ±		NPRDS / PROJEC 859		1		
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	SOURIAU [SHEET			
С	8D013W0	BBA-C		A 1/2	J		

r		۵	н г	m	D	0	
4		Contact Layout				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	Panel Cuto
	Ctc	3#16 13-03 X Y			ž		
ω	A B C	2.39 1.47 0 -2.79 -2.39 1.47					Dim ØA ØAA R1 ØT
						SOURIAU shall not b due to a use of th the Specifications issu (professional	he Products w Jed by either c
N						PN:	Count FR 8D013
					A 16-10 ISS DA Designed By:	-2016 First Release	
_					TITLE SCALE NA		Aluminiur General linear Tolerances: ±
					SOURI		
			1		FORMAT A3	3	OURIAL 3D013W
	Н	G	F	E	D	C	

