
_					
_	<u>دی</u>	11	111	0	0





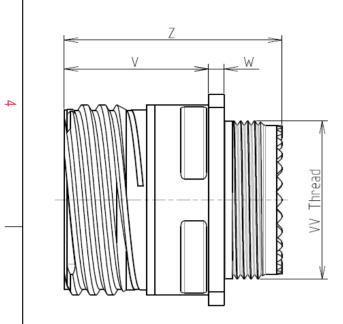

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
N	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating : Gold over copper Alloy 0.8µm minimu				
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	-65°C to +200°C			
	-Salt Spray	: 48 hours			
	-Mass	: 43.73 g ± 10%			

8D 0

G

21

-

F

48

S

F

Ν


Dim Nominal		
Р	3.25±0.2	
PP	4.93±0.2	
R1	31.75	
R2	29.36	
S	39.7±0.3	
V	20.07+0/-1.25	
W	2.1/3.2	
Z	31.5 Max	
VV THREAD	M31x1-6g	


ORIENTATION : N

CONTACT LAYOUT : 21-48

CONTACT TYPE : SOCKET(500 Matings)

Е



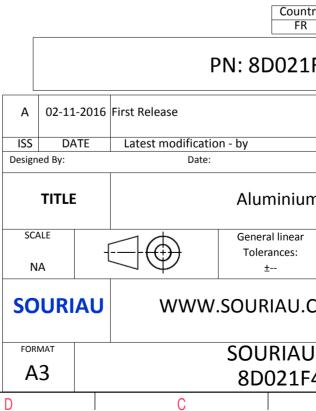

σ		А			
R			4		
AS EXAMPLE			3		
s which does not er of the Parties indation, technica	or by a third party		2		
1F48SN					
			MOD N°		
	CUSTOMER				
um Recepta	um Receptacle 8D series				
ar :	NPRDS / F 85 9		1		
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N F48SN-C			SHEET		
<u>- F403IN-C</u> B		A	<i>'</i>		

		۵	н п	m	D		0		ω
		Contact Layout						Panel Cu	tout
		48				SQI	JARE FLANGE RECEPTACLE (T REAR MOUNTING	YPE 0)	SQUARE
4	-					Σ	R1		2
	· · · · · ·	4#8 Power 21-48				V			¥
	Ctc A	X Y 4.57 4.57						ØT_	
	B	4.57 -4.57 -4.57 -4.57						Dim	Nomina
ယ	D	-4.57 -4.57						ØA	36.12 m
								ØAA R1	32.16 m 31.75
							SOURIAU shall no due to a use o the Specifications i (professio	of the Products	which does r of the Part
N								Cou	ntry R
							Р	N: 8D02	1F48SN
					A		First Release		
					ISS Designed	DATE Bv:	Latest modification Date:	n - by	
						ITLE		Alumini	um Rece
<u> </u>					SCALE	-		General linea Tolerances: ±	
					SOL	JRIAU	www.	SOURIAU	.COM

F

Е

G

Н

FORMAT

A3

D

С

