

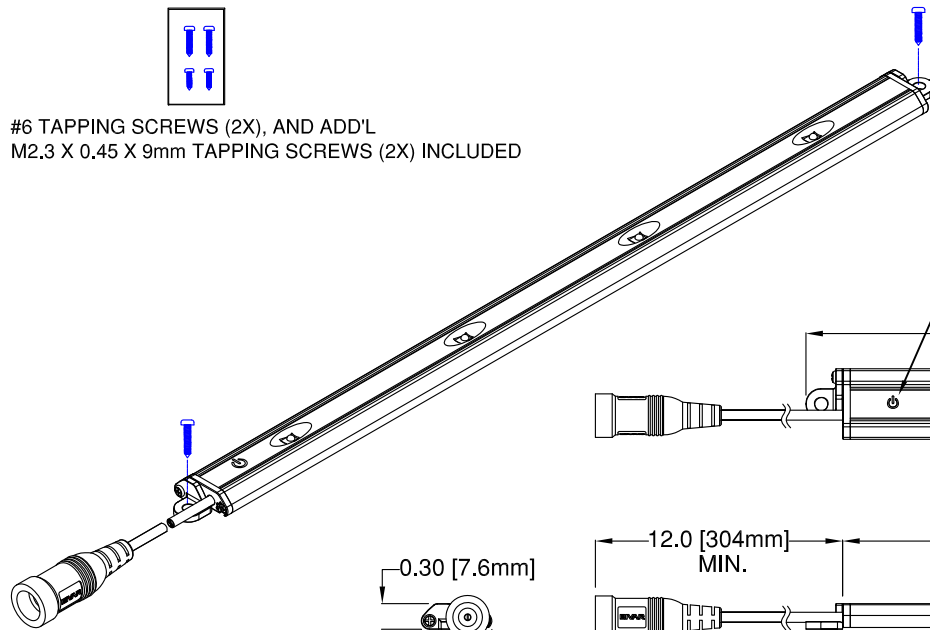
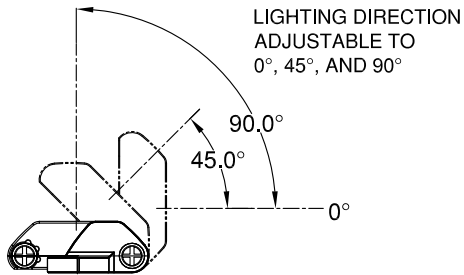
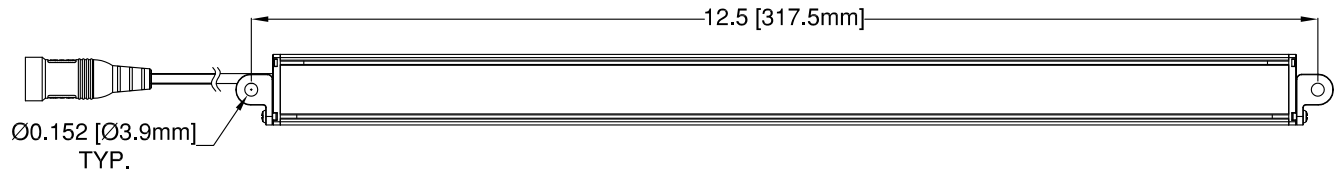


#6 TAPPING SCREWS (2X), AND ADD'L
M2.3 X 0.45 X 9mm TAPPING SCREWS (2X) INCLUDED

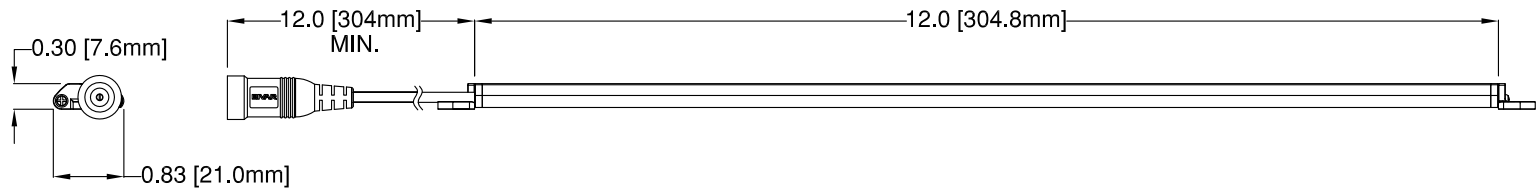

REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	6/12/18	G.O.

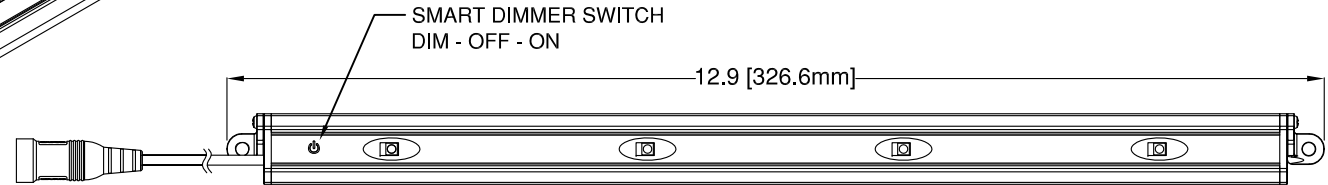

1. Power Input: 24VDC, Constant Voltage
2. Power Consumption: 5.0 Watts
3. White Color Temperature: 3100K Warm White
4. Output Projection: 120° FWHM
5. Luminous Output: 320 Lumens (130 Lumens When Dimmed)
6. Housing Color: Black
7. Operating Temperature: 0C ~ +40C
8. For Use in Dry Locations Only
9. Pre-set to "ON" When Initially Powered



Mating Connector:
5.5 x 2.1 x 11mm DC Plug

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		BIVAR®	
DECIMALS	ANGULAR	4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
.X ± .1	X° ± 1°	TITLE: BC5000 SERIES LIGHTING WARM WHITE	
.XX ± .02		DESIGNED:	DATE:
.XXX ± .010		TD. NGUYEN	6/12/18
		PART NO:	REVISION:
		BC5000-W-S	A
		REVISER:	DATE:
		N/A	N/A
		CAGE CODE:	SCALE:
		32559	NONE
		CHECKED:	DATE:
		K. BARON	6/12/18
		SHEET # 1 OF 1	
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING			