


Readability 10 g – 0.02 lb / 20 g – 0.05 lb

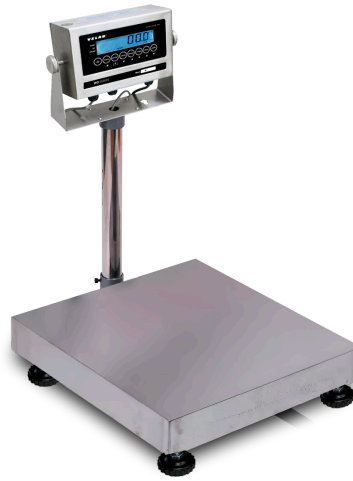

► **Features**

- RS232 interface.
- Internal rechargeable battery.
- Robust stainless steel construction
- High contrast LED display
- Auto shut-off
- Industrial rubber feet

► **Standard Functions**

- Weighing
- Parts counting
- Dynamic weighing
- Checkweighing
- Hold function

► **Accessories Included**

- Power adapter.

TECHNICAL DATA		
Model	VE-WD60M	VE-WD150M
Capacity	60 kg / 130 lb	150 kg / 330 lb
Readability	10 g / 0.02 lb	20 g / 0.05 lb
Repeatability	±10 g / ±0.02 lb	±20 g / ± 0.05 lb
Linearity	±10 g / ±0.02 lb	±20 g / ± 0.05 lb
Weighing Units	Kg, lb	
Calibration	External	
Pan Size	400 x 500 mm / 15.7" x 19.7"	
Stabilization Time	2 seconds	
Interface	RS232	
IP Protection	IP 65	
Display	LCD, digit height 25mm / 1"	
Housing	Stainles steel construction	
Operating Environment	-10° to 40°C / 14° to 104°F	
Overall Dimensions	400 x 560 x 105 mm / 15.7"x22"x4.1"	
Power Supply	110/240V, 50/60 Hz AC Adapter and rechargeable battery	
Net Weight	11.5 kg / 25.5 lb	
Warranty	1 year	