
Mounting Option

08-#4-40 Unified Threaded Inserts


Contact Detail

540-Wire Wrap .025 Sq.(0.64 Sq.) - Tail LG=.560(14.22) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

2.665 [67.69] 2.504[63.60] Card Slot Accepts .054 [1.37] to .070 (1.78) Thick P.C. Board 0.370 [9.40]

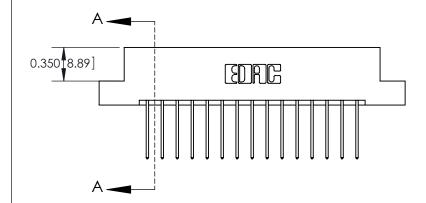





See Accompanying Page for:

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

333 Series Card Edge Connector Part Number: 333-030-540-208



| | ACAD REFERENCE NO. 333 ENG MASTER | | | |
|---|-----------------------------------|------------------|--|--|
| | DRAWN: J.LEE | DATE: OCT. 14/09 | | |
| | CHECKED: | DATE: | | |
| | SCALE: NTS | SHEET 1 OF 4 | | |
| 0 | DRAWING NUMBER | ISSUE | | |

333 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER

ORIGINAL

1



| 333 Series Card Edge Conn | ACAD REFERENCE NO. 333 ENG MASTER | | | |
|---------------------------|---|------------------|--------------|-------|
| Contact Bend Detail | DRAWN: J.LEE | DATE: OCT. 14/09 | | |
| Confact bend belaii | | CHECKED: | DATE: | |
| EDAC INC | EDAC INC TORONTO, ONTARIO CANADA UR CONNECTION TO QUALITY & SERVICE THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | | SHEET 2 OF 4 | |
| | | | | ISSUE |
| | | | | 1 |

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER



SOL NUMBER

ORIGINAL

1



| 333 Series Card Edge Conn | ACAD REFERENCE NO. 333 ENG MASTER | | | | |
|--------------------------------------|---|----------|-------------|---------|-----------|
| | | | J.LEE | DATE: O | CT. 14/09 |
| Mounting Options | | CHECKED: | | DATE: | |
| EDAC INC | | SCALE: | NTS | SHEET : | 3 OF 4 |
| IORONIO, ONIARIO SHALL NOT BE REF | ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR LISED AS THE BASIS FOR THE | DRAWING | NUMBER | | ISSUE |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS | 3 | 33 Assembly | | 1 |

ISSUE NUMBER

ORIGINAL



Features

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 333 Series Card Edge Connector | ACAD REFERENCE NO. 333 ENG MASTER |
|-----------------------------------|---|
| Features and Specifications | DRAWN: J.LEE DATE: OCT. 14/09 |
| realities and specifications | CHECKED: DATE: |
| EDAC INC THESE DRAWINGS A | ND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4 |
| IORONIO, ONIARIO SHALL NOT BE REF | PRODUCED, OR COPIED DRAWING NUMBER ISSUE |
| | SALE OF APPARATUS 333 Accombly 1 |