


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

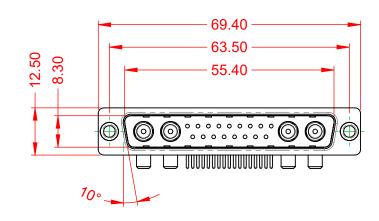




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


OPERATING TEMPERATURE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/0	CO-AX CONTACT RATING:	40A (CURRENT)
(IF PRES	ENT)	
SIGNAL C	CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL C	CONTACT RESISTANCE:	10mΩ MAX.
INSULAT	OR RESISTANCE:	5000MΩ min.
DIELECT	RIC	
DIECEOII		

DIELECTRIC WITHSTANDING VOLTAGE:



					SW REFERENCE NO.: 629 COMBO ASSEMBLY					
	COMBINATION D-SUB			C.B	DATE:	JAN. 0′	1/201	19		
					DATE:					
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (I	IN C.A.D. 1:1)	SHEET	1	OF	2		
	CANADA OR USED AS THE BASIS FOR THE	DRAWING N	NUMBER: 629-21W4	1240-4T1			ISSUE			
YOUR CONNECTION TO	QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMB	BER: 629-21W4	1240-4T1			1		

-55°C ~ 125°C

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

