

## SUMMARY



Image is for illustrative purpose only

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

### Download

[Request a quote](#)

[Catalog](#)

Series	1S
Termination type	No contacts / Accessory
IP rating	61
Cable Ø	0.00 - 0.00 mm
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	BRR*: Cap spring loaded dust cap for ERA,ERN and EG receptacle or PSA and PK fixed receptacle
Keying	No keying
Housing Material	PSU (Polysulfone) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Variant	G : Grey
Weight	1.05 g

### Performance

Configuration
Insulator
Rated Current

### Others


Endurance (Shell): 5000 mating cycles

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Temp (min / max): -50°C / +150°C  
 Axes material: Nickel-plated brass  
 Maximum operating temperature: 100°C  
 Watertightness: IP61 according to IEC 60529  
 IP Rating: 61

## DRAWINGS

### Draws

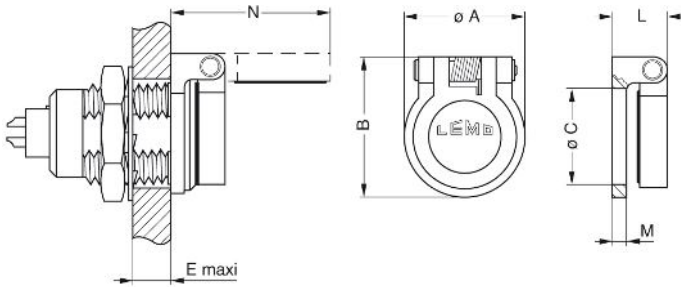

No keying

### Dimensions

	A	B	C	E	L	M	N
mm.	14.2	17.1	12	6	6.3	1.5	20.3
in.	0,56	0,67	0,47	0,24	0,25	0,06	0,80

## RECOMMENDED BY LEMO

### Tools

None

### Cables

121 221			
131 221			

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*