

**MICRO SWITCH**  
a Honeywell Division

FED. MFG. CODE 91 929



SWITCH - BASIC

CATALOG LISTING

V3-1075

CK-L7500

CATALOG LISTING  
V3-1075  
PAGE 1 OF 1  
RELEASE NO. PR-5913  
REPLACES  
CHECK  
ISSUE  
12

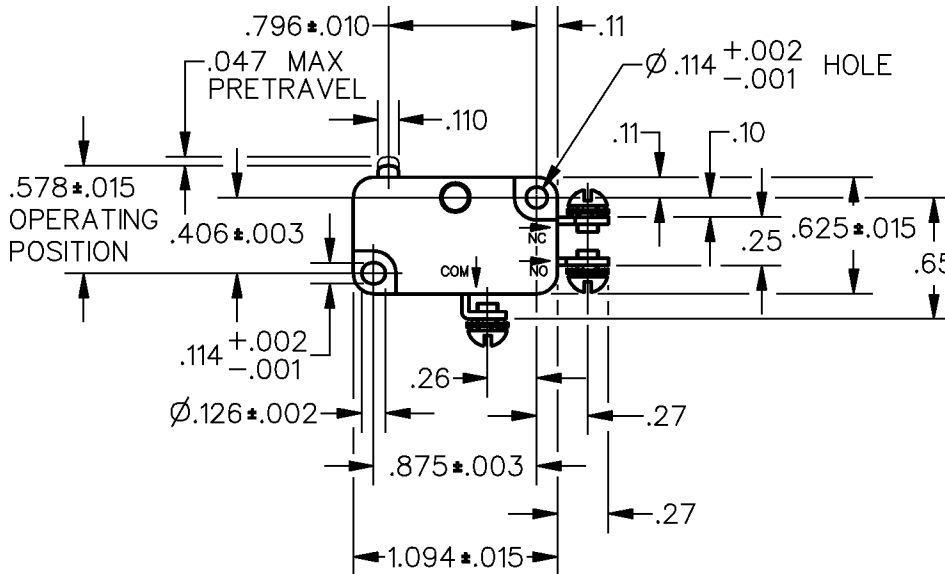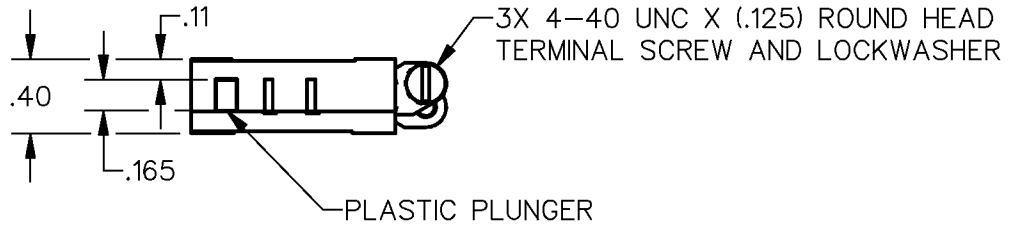

REVISIONS

A	OBS	CO77905
	DAW	18 JUL 94
B	RE-INS	CO82848
	DCS	18 JUL 96
C	CO-93311	
	TSM	21 OCT 98
D	0005782	
	R J	04 JUN 04


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 3 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 6-14 OZ MAX	CONTACT ARRANGEMENT S P D T	<b>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</b>	
RELEASE FORCE — — — — — 4 OZ MIN	L22 1A 125 VAC	ONE PLACE (.0) ± .030	
DIFFERENTIAL TRAVEL — — — .006-.016		TWO PLACE (.00) ± .015	
OVERTRAVEL — — — — — .040 MIN		THREE PLACE (.000) ± .005	
FREE POSITION — — — — — .625 MAX		ANGLES ±	
RELEASE TRAVEL — — — — — .007 MIN		WEIGHT	



FORMTEK  
DRAWN  
DCS 18 JUL 96  
CHECK  
AK  
04 JUN 04  
CHECK