




| | |
|-------------------------|----------------------------------|
| conductor cross section | 1.5mm ² max. AWG16 |
| cable outside diameter | 4 - 8mm |

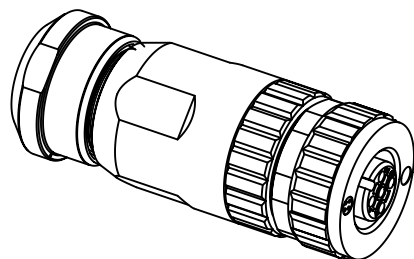

| | | | | | | |
|---|--|---|--------------------------|---------------------------|--------------------|--|
|  |  All Dimensions in mm Original Size DIN A4 | Scale 2:1 | Free size tol. | | | Ref. Sub. TB 21033292401 500000089142 2015-05-11 |
| | All rights reserved Department EC PD - DE | Created by EISFELD | Inspected by WELLMANN | Standardisation KOHLER | Date 2015-05-12 | State Final Release |
| HARTING Electronics GmbH D-32339 Espelkamp | | Title HARTING M12 screw str 4-pole A-coded female shielded | | | | Doc-Key / ECM-Nr. 100621573/UGD/001/B 500000089167 |
| | | Type TB | Number 21033292401 | | | Rev. B Page 1/1 |