




Data sheet | Item number: 756-5302/050-050

Sensor/Actuator cable; M12A socket; angled; 5-pole; Length: 5 m

www.wago.com/756-5302/050-050



i Picture differs from the item.

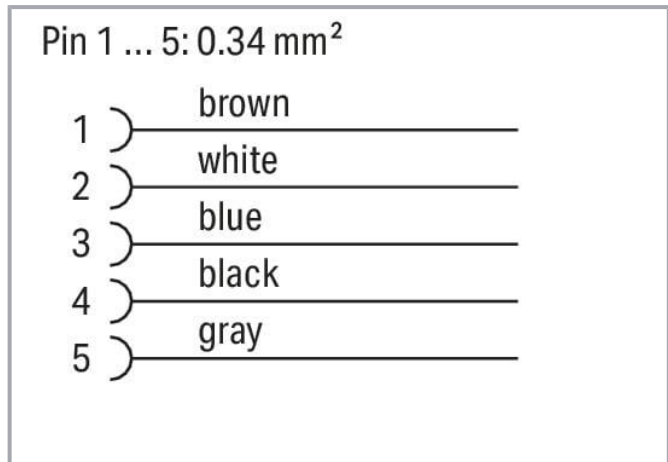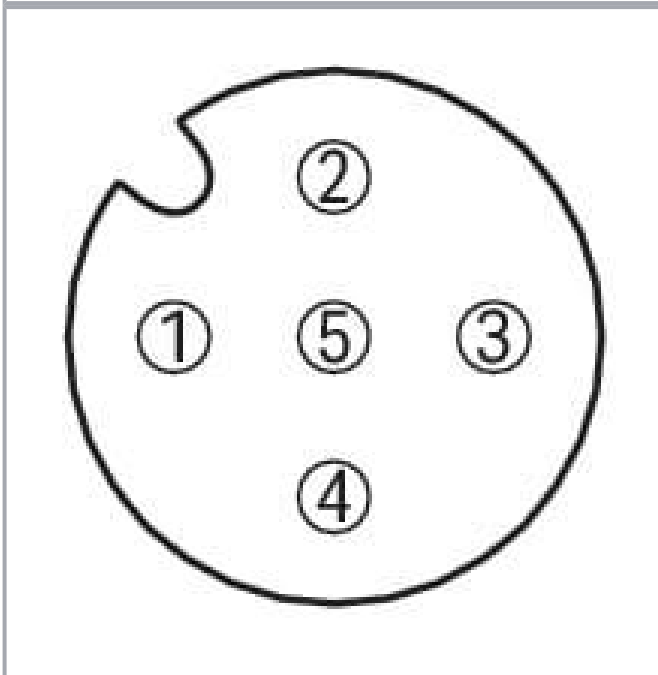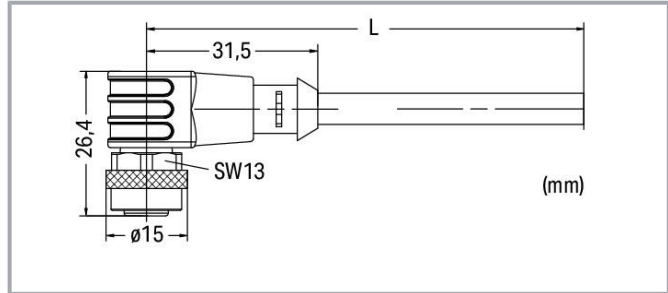

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	5 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable diameter	4.8 ... 5.2 mm

Connector

Connection type	M12 Socket - free end
Cable connection direction to mating direction	90 °
Connector interface coding (cable/adaptor) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4044918975018
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	7bb4fe42-e393-490a-848a-88b85d0deae1
SCIP notification number (Belgium)	21595f0a-600d-4bc4-b0bc-d85900ef4218
SCIP notification number (Bulgaria)	693e3ee2-b80b-49da-9c77-c992a5005aa7
SCIP notification number (Czech Republic)	517b6ce4-2a97-4f32-bddc-71231c4dd481
SCIP notification number (Denmark)	b44241e9-8beb-4c86-b159-c0c3c3abd91c
SCIP notification number (Finland)	e95f9787-db26-4644-a1a3-61f82be91105
SCIP notification number (France)	cafe3d3f-cc45-46a8-8461-6310f90e6367

Subject to changes. Please also observe the further product documentation!


WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

SCIP notification number (Germany)	9938deea-9674-461a-9053-3e686576a5b7
SCIP notification number (Hungary)	9eb2e8c0-8ddf-406c-bb29-5f198c8a04ed
SCIP notification number (Italy)	2936119d-80f0-46bf-a64a-4d6c3282b671
SCIP notification number (Netherlands)	b523acc9-6971-48eb-b7e3-0d38154a2c59
SCIP notification number (Poland)	b8a463ba-b377-406f-8abf-02f1abe6aa0f
SCIP notification number (Romania)	96743d1c-592d-4e93-a8d6-8f4951be29c7
SCIP notification number (Sweden)	cec24caa-5133-420a-9378-12d809e1f23a

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5302/050-050 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5302/050-050 doc - Datei	2017 Sep 20	doc 27.1 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5302/050-050	URL	Download
WSCAD Universe 756-5302/050-050	URL	Download

Subject to changes. Please also observe the further product documentation!



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5302/050-050
Sensor/Actuator cable; M12A socket; angled; 5-pole; Length: 5 m

URL

Download

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.