
	I	Q	н <b>т</b>	m	0





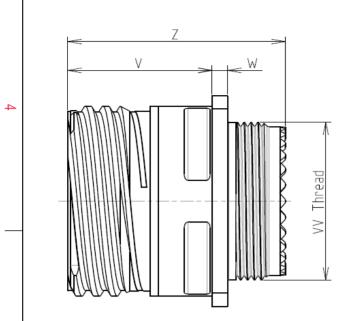

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Without Plating				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	- 65℃ to +175℃				

: 2000 hours

: 18.3 g ± 10%

8D 0

G

13

Х

98

В

F

С


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		


ORIENTATION : C

CONTACT LAYOUT : 13-98

CONTACT TYPE : SOCKET(500 Matings)

Е



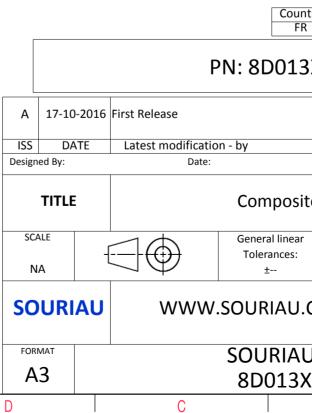

	œ		1	>				
			1					
		5				4		
AS EXA	AMPLE					3		
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)								
untry R	Jurisdiction & Control List Not Listed							
3X98BC								
		CUST	OMER DRAWING		MOD N°	-		
site	e Receptacle 8D series							
ar :	NPRDS / PROJECT 859							
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	DRG N°	<u> </u>			SHEET			
x9	8BC-C B		ļ		1/2	J		

		۵	г т	т	D	0	
		Contact Layout					Panel Cutou
4		$X \begin{pmatrix} \bullet & \bullet \\ $				SQUARE FLANGE RECEP REAR MOUNT	TACLE (TYPE 0)
	Cont positio A B CC D E E F G G H J J K	n ID         (mm)         (mm)           + 000 (0.00)         + 195 (4.95)           + 1.25 (3.18)         + 150 (3.81)           + 1.25 (3.18)         + 0.00 (0.76)           + 1.04 (4.17)         - 105 (2.67)           + 1.90 (0.00)         - 135 (3.43)           - 1.164 (4.17)         - 105 (2.67)           + 1.90 (0.00)         - 135 (3.43)           - 1.164 (4.17)         - 105 (2.67)           + 1.91 (3.90)         + 0.00 (0.76)           + 1.92 (3.18)         + 1.90 (3.81)           + 0.05 (1.65)         - 0.15 (0.38)					
ω	Shell Arrangement N size no. cr	Number of contacts         Size rating         Contact location         Supersedes           10         20         I         All         MS20051-98					Dim ØA ØAA R1 ØT
	_						
						due to the Specifica	shall not be liable for any a use of the Products whi ations issued by either of ofessional recommendati
N							Country FR
							PN: 8D013X
					A 17 ISS Designed B	7-10-2016 First Release DATE Latest modif y:	ication - by Date:
					п	rle	Composite
<u> </u>					SCALE NA		General linear Tolerances: ±
					SOU	RIAU WV	VW.SOURIAU.C
					FORMAT A3		SOURIAU 8D013X9
	Н	G	F	E	D	C	

