
בΩ	<del>ات</del>	m	τ	<b>J</b>	0	ω	A	
A Thread the second sec	ØS							
					LAYOUT SHOWN	I AS EXAMPLE		
	Keying Shown a	as example						
CHARACTERISTICS	Г	Connector dimension	7					
-Standard : Based on MIL-DTL-38999 Series III	F	DimNominalØS41.7 Max	-					
-Shell Material : Aluminium   -Shell Plating : Olive drab Cadmium   -Insulator : Thermoplastic   -Contacts : Copper Alloy		Z 31 Max VV THREAD M31x1-6g	-		SOURIAU shall not be liable f due to a use of the Produc the Specifications issued by eit (professional recomm	cts which does not comply	v with third party	
-Seals & Grommet : Silicon Elastomer → -Contact Plating : Gold over copper Alloy 0.8µm minin	num				C		n & Control List ot Listed	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories	num				PN: 8D52	21W42PN		
-Temperature Range -65°C to +175°C				A 10-10-2016	5 First Release			
-Salt Spray : 500 hours			-	ISS DATE Designed By:	Latest modification - by Date:	CL	JSTOMER DRAWING	MOD N°
				TITLE	TITLE Aluminium Plug 8D series			
→ BASIC SERIES: 8D 5 - 21 SHELL TYPE : Plug with RFI Shielding	W 42 P N		-	SCALE	General lir Tolerance ±		NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact			NTATION : N	SOURIAU	WWW.SOURIA	U.COM	This document is the prope SOURIAU it must not be reproduce	d or
SHELL SIZE : 21 PLATING : W = Olive drab Cadmium	┘ │ └───	CONTACT TYPE : PIN(5		FORMAT		AU DRG N°	communicated without per	nission SHEET
	I	CONTACT LA		A3		1W42PN-C		1/2
		1					1	

	Ŧ	െ	н Г	m	U	0	
4	(	Contact Layout 42					
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					
ω							
	+					SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recon	oducts wh either o mmendat
N						PN: 8D	Countr FR 521V
					A 10-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
<u> </u>					SCALE NA	Genera Tolera	Alumin al linear ances: :
					FORMAT A3	SOU	
	Н	G	F	E	D	C	

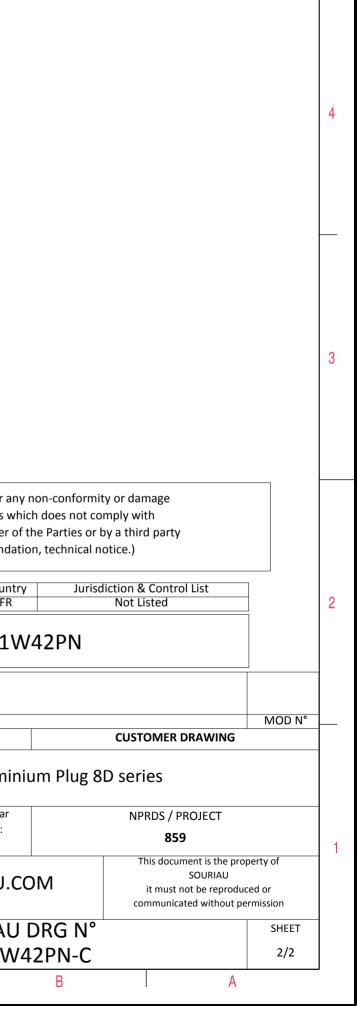

 $\triangleright$ 

σ