



.XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	1

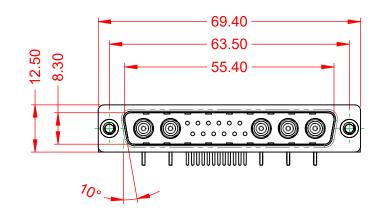




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDAN
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONT. 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE:


**OPERATING TEMPERATURE:** 

NCE)

-55°C ~ 125°C

ГАСТ

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBIN	COMBINATION D-SUB		DRAWN: C.B		DATE: JAN. 01/2019		
			CHECKED:		DATE:		
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1	:1)	SHEET 1 OF	2		
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-17W5		5640-7T4	ISSUE	
YOUR CONNECTION TO QUALITY & SE			PART NUMBER:	629-17W	5640-7T4	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

