



μ

ISSUE NUMBER	
ORIGINAL	1

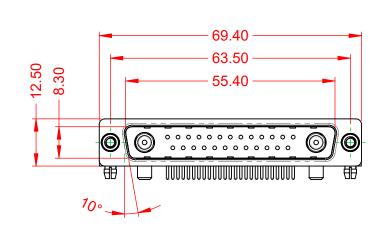



.XX ±0.13 .XXX ±0.05

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED

10.67 [e]e]e]e]e]e]e]e]e]e]e ۲ O 13.20-

OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.

WITHSTANDING VOLTAGE:

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY						
				DRAWN: C.B		DATE: JAN. 01/2019		19	
				CHECKED:		DATE:			
		EDAC INC TORONTO, ONTARIO CANADA D QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: ((IN C.A.D. 1:	1)	SHEET	1 OF	2
				DRAWING NUMBER: 629-27W2			V2640-4N5		ISSUE
	YOUR CONNECTION TO QUALITY			PART NUM	BER:	629-27W2	2640-4N5		1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

