


Readability **0.5 kg – 1.1 lb**

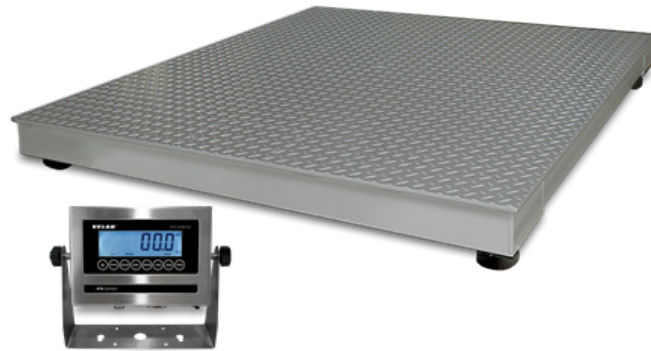

► **Features**

- RS232 interface.
- Internal rechargeable battery.
- Diamond plate surface for added grip.
- 10m / 32' indicator cable
- High contrast LED display
- Auto shut-off
- Robust construction for demanding use
- Industrial rubber feet

► **Standard Functions**

- Weighing
- Parts counting
- Dynamic weighing
- Checkweighing
- Hold function

► **Accessories Included**

- 3 AA batteries
- Display Mount

TECHNICAL DATA		
Model	VE-PS2000	VE-PS3000
Capacity	2000 kg / 4400 lb	3000 kg / 6600 lb
Readability	0.5 kg/1.1 lb	0.5 kg/1.1 lb
Repeatability	±0.5 kg/1.1 lb	±0.5 kg/1.1 lb
Linearity	±1 kg/2.2 lb	±1 kg/2.2 lb
Loadcells	4	
Cable length	10m / 32'	
Weighing Units	kg, lb	
Calibration	External	
Pan Size	1200 x 1200 mm / 47.2" x 47.2"	
Stabilization Time	2 seconds	
Interface	RS232	
Display	LCD, digit height 25mm / 1"	
Housing	Mild steel base	
Operating Environment	-10° to 40°C / 14° to 104°F	
Overall Dimensions	1200 x 1200 x 110mm / 47.2" x 47.2" x 4.3"	
Power Supply	110/240V, 50/60 Hz AC Adapter and rechargeable battery	
Net Weight	175lb / 79kg	
Warranty	1 year	