
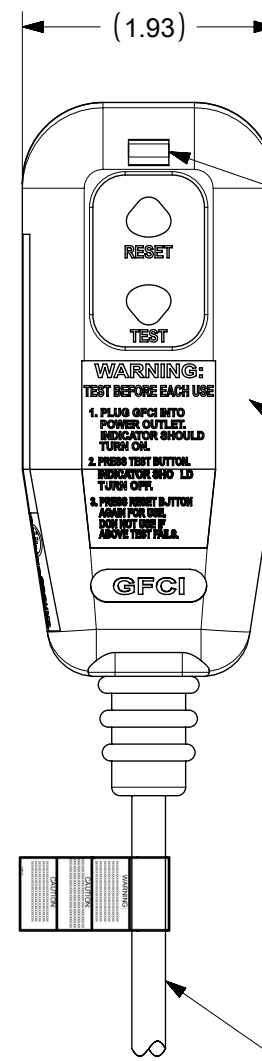


CORD STRAIN RELIEF

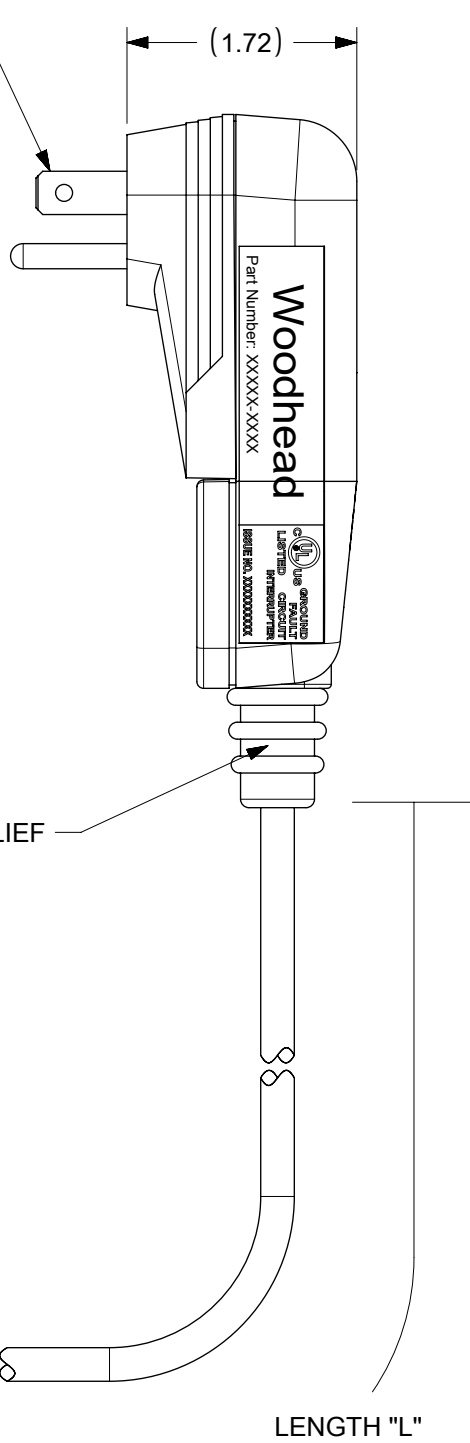

TECHNICAL:
LISTED: UL AND cUL
RATED SUPPLY VOLTAGE: 120 VAC
RATED CURRENT: UP TO 15 AMPS OR CABLE RATING
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 4-6 mA
OVERLOAD CURRENT: 90 AMP 125 VAC
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	POWER-UP
1301530093	15054-1TTA	2 FT ± 1 IN	AUTO
1301530097	15054-25TTA	25 FT ± 2 IN	AUTO
1301530094	15054-1TTM	2 FT ± 1 IN	MANUAL
1301530098	15054-25TTM	25 FT ± 2 IN	MANUAL

FUNCTIONAL SYMBOLS E=0 E=0 E=0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: MIGRATION TO ECTR/NX			
	DIMENSION UNITS	SCALE	<p>molex</p> <p>120V 15A PLUG GFCI W/ MOLDED TRIPLE TAP NEMA 5-15</p> <p>PRODUCT CUSTOMER DRAWING</p> <p>DOCUMENT NUMBER: SD-130153-018 DOC TYPE: PSD DOC PART: 001 REVISION: A1</p>			
	GENERAL TOLERANCES (UNLESS SPECIFIED)					
	ANGULAR TOL ± °					
4 PLACES ±						
DIVISIONAL SYMBOLS	3 PLACES ±	EC NO: 683960	DRWN: VASUTHKARP	2021/10/27		
	2 PLACES ±	CHKD: DNGUYEN62	2021/11/15			
	1 PLACE ±	APPR: HKNEELAND	2022/01/21			
	0 PLACES ±	INITIAL REVISION: DRWN: MC 2005/12/06				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER
			B-SIZE	130153	SEE TABLE	GENERAL MARKET
						SHEET NUMBER
						1 OF 1