THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER

ORIGINAL

1

MATERIALS:

HOUSING: PBT, UL94V-0

WIRE-HOUSING SEAL: SILICON RUBBER

CONTACT:

SPECIFICATIONS:

PITCH: 2.0MM

2. **RATED VOLTAGE: 250V**


RATED CURRENT: 2A MAX


WITHSTAND VOLTAGE: AC1000V R.M.S.

CONTACT RESISTANCE: 10 MOHMS MAX INSULATION RESISTANCE: 6.

1000 MOHMS MIN/DC 500V

TEMPERATURE RANGE: -40°C ~ +105°C



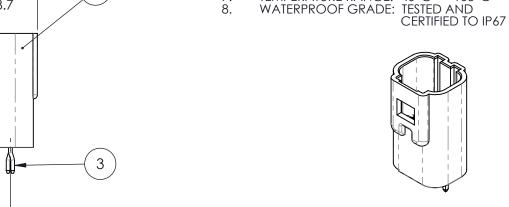



	ITEM NO.	DESCRIPTION	QTY.
	1	HOUSING	1
	2	SILICONE SEAL	1
	3	CONTACT	3



EDAC INC TORONTO, ONTARIO

CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.	566-003-421-701	
DRAWN:R.STA.MONICA	DATE: NOV.02/10	
CHECKED:	DATE:	
SCALE: NOT TO SCALE	SHEET 1 OF 1	
DRAWING NUMBER	ISSUE	

566-003-421-701



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY

0.02 0.5 SQ'

0.1

1.6

0.1

0.2 4

0.4

INSIDE