

.XXX ±0.05 10.70 5.80

.X ±0.25 .XX ±0.13



NOTES:

MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

			SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/2019			
			CHECKED:	DATE:		
	EDAG INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
			DRAWING NUMBER: 630-2WK2650-1T2		ISSUE	
			PART NUMBER: 630-2WK	2650-1T2	1	



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

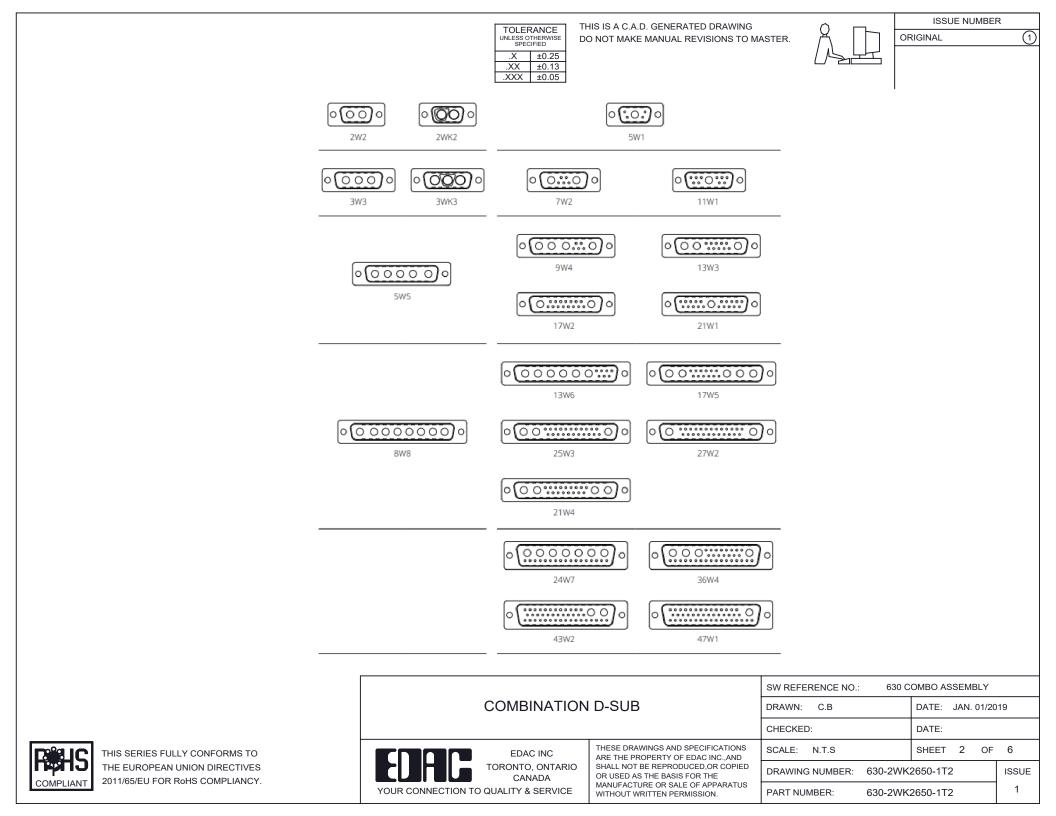



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** ORIGINAL

(1)

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female





5W5 Male



PCB EDGE

8W8 Male



PCB EDGE



PCB EDGE



27W2 Male/Female

21W4 Male/Female

PCB EDGE


22.70

5W5 Female




8W8 Female






17W2 Male/Female





PCB EDGE

10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



OR USED AS THE BASIS FOR THE

WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO. 630 COMBO ASSEMBLY C.B DATE: JAN. 01/2019 DRAWN: CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS 3 OF 4 SCALE: N.T.S SHEET ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED 630-2WK2650-1T2 DRAWING NUMBER: ISSUE MANUFACTURE OR SALE OF APPARATUS 1 PART NUMBER: 630-2WK2650-1T2

CURRENT RATING / ØA



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



COMBINATION D-SUB

TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77

24.77

23.36

PCB EDGE

31.75

21.9

36W4 Female



13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

13W3 Female

 .X
 ±0.25

 .XX
 ±0.13

 .XXX
 ±0.05

## 43W2 Female




17W5 Male


COMPLIANT










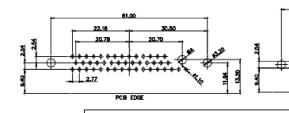


20.7

13.72

PCB EDGE



PCB EDGE



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR R₀HS COMPLIANCY.	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-2WK	2650-1T2	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-2WK	2650-1T2	1