

–		–	 _	
<u>_</u>	<u>رن</u>		 0	0



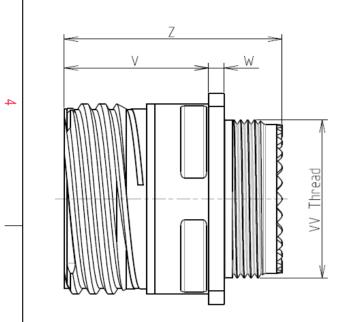

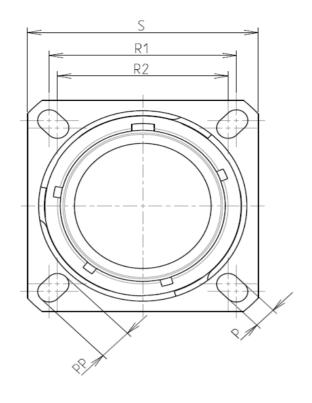

LAYOUT SHOWN AS

Keying Shown as example

L

С

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability : 500 Mating cycles				
-Delivered without Souriau contacts				
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 500 hours			

: 11.22 g ± 10%

8D 0

G

11

Ζ


22


Ρ

F

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е



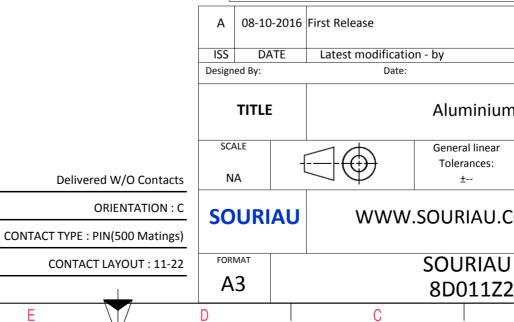

	ω		Þ			
					4	
					3	
AS EX4	AMPLE					
s whic er of t idatio	non-conformit ch does not co he Parties or t on, technical n	mply with by a third par otice.)	ty			
untry FR	Jurisd	liction & Con Not Listed	trol List	1	2	
1Z22PCL						
				MOD N°		
um	customer drawing m Receptacle 8D series					
ar		NPRDS /	PROJECT		-	
		-	59	and a f	1	
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	U DRG N° SHEET 1/2					
	B		A	1/2	J	

		Contact Layout				Panel Cut
4	(22*				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905			¥ (ØT ØT
သ	C D	-1.905 -1.905 -1.905 1.905]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend
2						PN: 8D011
					A 08-10-201 ISS DATE Designed By:	6 First Release Latest modification - by Date:
<u> </u>					SCALE NA	Aluminiu General linear Tolerances: ±
						SOURIA
	Н	G	F	E	A3 D	8D0112 C
					¥	

Т

ш

т

G

0

