

	_				_		
	_	נט	11	111	0	0	
1							



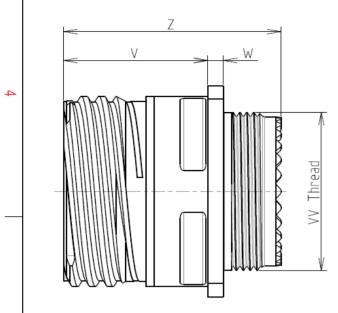

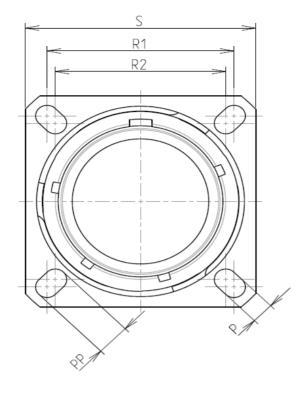

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Without Plating
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65℃ to +175℃

: 2000 hours

: 32.8 g ± 10%

8D 0

G

21

Х

11


Ρ


F

Е

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g

Е



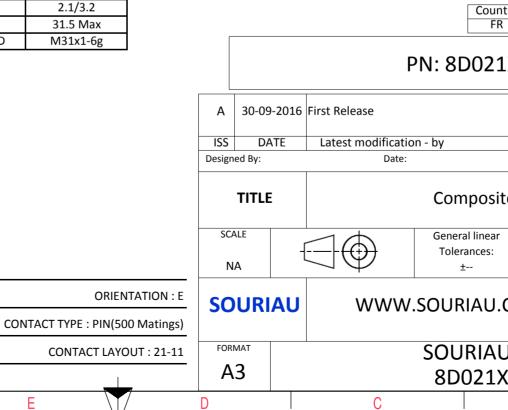

	ω		A		_	
					4	
AS EXA	AMPLE				3	
s whic er of t ndatio untry FR	non-conformit th does not co he Parties or t n, technical n Jurisc	mply wit by a third otice.)	h I party Control List		2	
	1			 MOD N°		
site	CUSTOMER DRAWING Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1	
	DRG N° 1PE-C	<u> </u>		SHEET		
.^1	B		A		J	

$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		T	۵	п –	m	D	0	
			Contact Layout					Panel Cutout
Image: State of the state	4	-x ($ \begin{array}{cccccccccccccccccccccccccccccccccccc$			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
α ΦΛ N ΦΛ ΦΛ ΦΛ N SOURAU shall not be liable for any due to a use of the Products whit the Specification is sued by either of (professional recommendation) N Countrol M 30.09.2016 First Release DATE Usegerd Net Latest modification - by Usegerd Net Latest NA Φ SOURIAU Composite NA Φ SOURIAU MWWX-SOURIAU.CO NA SOURIAU A3 SOURIAU		Contact position ID X-axis (mm) A +.121 (3.07) B +.306 (7.77) C +.344 (8.84) D +.227 (5.77) E +.000 (0.00) F 227 (5.77) Shell Arrangement no. Nu	(Insert arrangement 21-11) ion Contact Location Y-axis position X-axis (mm) ID (mm) +.332 (8.43) G 348 (8.84) 061 (1.55) +.177 (4.50) H 306 (7.77) +.177 (4.50) 271 (6.86) K +.000 (0.00) +.123 (3.12) 353 (8.97) L +.000 (0.00) 115 (2.92) 270 (6.86) mber of Size Service Contact Supersed ontacts contacts rating location Supersed	5		ά Υ		-
No No No No No No No No No No	ى ن						ØA ØA R1	A
No No No No No No No No No No	$ \longrightarrow $							
R PN: 8D021X A 30-09-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Composite SCALE NA General linear Tolerances: ± SOURIAU WWW.SOURIAU.CO FORMAT A3 8D021X1		9					due to a use of the the Specifications issued	Products whi d by either of
A 30-09-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Composite SCALE NA General linear Tolerances: ± SOURIAU FORMAT SOURIAU.CO FORMAT SOURIAU.CO	N							Country FR
ISS DATE Latest modification - by Designed By: Date: TITLE Composite SCALE General linear NA Image: Date: SOURIAU WWW.SOURIAU.CO FORMAT SOURIAU A3 SOURIAU							PN:	8D021X
Designed By: Date: TITLE Composite SCALE General linear NA Tolerances: ± ± SOURIAU WWW.SOURIAU.CO FORMAT SOURIAU A3 SOURIAU								
SCALE NA SOURIAU FORMAT A3 SOURIAU SOURIAU A3 SOURIAU SOURIAU SOURIAU A3 SOURIAU								
NA Tolerances: ± SOURIAU WWW.SOURIAU.CO FORMAT SOURIAU A3 8D021X1						TITLE	C	omposite
FORMAT SOURIAU A3 8D021X1	_							olerances:
A3 8D021X1						SOURIA	WWW.SOL	JRIAU.CO
		Н	G	F	E	D		

