

ADM6-	XXX-XX	(.X-XXX	-4-X-X-XR

-10, -20, -30, -40, -50, -60, □-70, □-80, □-90, □-100 (PER ROW)

**LEAD STYLE** 

-01.5: 1.5MM -03.5: 3.5MM -06.5: 6.5MM -08.5: 08.5MM

**PLATING SPECIFICATION** 

-L: 10µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL -S: 30µ" SELECTIVE GOLD IN CONTACT AREA. MATTE TIN ON TAIL □ △-STL: 30u" SELECTIVE GOLD

IN CONTACT AREA.

4 ROW

**OPTION** 

TIN/LEAD ON SOLDER TAIL

(\*\* = NOT RELEASED)

 $(\Box = ONLY AVAILABLE IN -01.5 LEAD STYLE)$  $(\triangle = ONLY AVAILABLE FOR -40 POSITION)$ 

PACKAGING (SEE NOTES 1, 3 & 4)

-FR: FULL REEL QTY TAPE & REEL

-TR: TAPE & REEL

-A: ALIGNMENT PIN (SEE SHT 3, FIG 3)

\*\*-0: NO SOLDER BALL □ △-1: 63.0% TIN/37.0% LEAD -2: 96.5% TIN/3.0% SILVER/

0.5% COPPER

SOLDER BALL COMPOSITION

BLANK: NO ALIGNMENT PIN

TABLE 1				
STACK HEIGHT				
ADF6 LEAD	ADM6 LEAD STYLE			
STYLE	-01.5	-03.5	-06.5	-08.5
-03.5	5.00 [0.197]	7.00 [0.276]	10.00 [0.394]	12.00 [0.472]
-07.5	9.00 [0.354]	11.00 [0.433]	14.00 [0.551]	16.00 [0.630]

**TABLE 2** No. OF POS. "A" "B" "C" "D" "E" "T" PER ROW 5.715 [.2250] 8.395 [.3305] 5.72 [.2250] -20 17.42 [.6856] 19 12.065 [.4750] 14.745 [.5805] 12.07 [.4750] 23.77 [.9356] 29 18.415 [.7250] 21.095 [.8305] 18.42 [.7250] -30 0.46 [.018] 27.445 [1.0805] 24.77 [.9750] -40 30.12 [1.1856] 39 24.765 [.9750] 0.46 [.018] 49 31.115 [1.2250] 33.795 [1.3305] -50 36.47 [1.4356] 31.12 [1.2250] 0.46 [.018] -60 42.82 [1.6856] 59 | 37.465 [1.4750] 40.145 [1.5805] 37.47 [1.4750] 0.46 [.018] -70 49.17 [1.9356] 69 43.815 [1.7250] 46.495 [1.8305] 43.82 [1.7250] -80 55.52 [2.1856] 79 50.165 [1.9750] 52.845 [2.0805] 50.17 [1.9750] 0.41 [.016] -90 61.87 [2.4356] 89 56.515 [2.2250] 59.195 [2.3305] 56.52 [2.2250] 0.41 [.016] -100 68.22 [2.6856] 99 62.865 [2.4750] 65.545 [2.5805] 62.87 [2.4750] 0.41 [.016]

(SOME CENTER FEATURES REMOVED FOR CLARITY)

(3 PLCS)

1. TAPE & REEL IS STANDARD PACKAGING.

"G"

2.900 [0.1142]

4.900 [0.1929]

7.900 [0.3110]

9.900 [0.3898]

TABLE 3

2. NOTE DELETED.

"F"

3.40 [0.134]

5.40 [0.213]

8.40 [0.331

-08.5 | 10.40 [0.409]

LEAD

STYLE

-01.5

-03.5

-06.5

3. ORDERS WILL BE PACKAGED ACCORDING TO THE SAMTEC PACKAGING EFFICIENCY STANDARDS (SPES) FOUND ON WWW.SAMTEC.COM

"H"

0.800 [0.0315]

5.800 [0.2283]

2.800 [0.1102] 5.32 [0.209]

7.800 [0.3071] 10.32 [0.406]

"R"

3.32 [0.131]

8.32 [0.328]

- 4. ATTACH LABEL-4X2 TO EACH REEL.
- 5. K-DOT PROVIDED AS STANDARD.

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING REPRODUCTION USE PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED. IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC INC

DO NOT SCALE DRAWING SHEET SCALE: 4:1

INSULATOR: LCP, COLOR BLACK CONTACT: COPPER ALLOY



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com

DESCRIPTION

ADM6 ASSEMBLY

ADM6-XXX-XX.X-XXX-4-X-XR

BY: J RUZZI 6/14/2016 SHEET 1 OF 4

FIG 1

ADM6-30-01.5-XXX-4-X-XR SHOWN


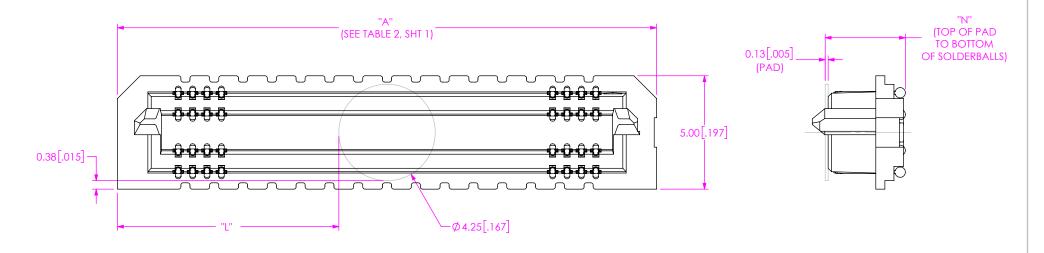


FIG 2
POLYIMIDE PAD
ADM6-30-1.5-XXX-4-X-XR SHOWN
(SOME CENTER FEATURES REMOVED FOR CLARITY)


TABLE 4		
-No. OF POS PER ROW	"L"	
-10 POS	3.41 [0.134]	
-20 POS	6.58 [0.259]	
-30 POS	9.76 [0.384]	
-40 POS	12.93 [0.509]	
-50 POS	16.11 [0.634]	
-60 POS	19.28 [0.759]	
-70 POS	22.46 [0.884]	
-80 POS	25.63 [1.009]	
-90 POS	28.81 [1.134]	
-100 POS	31.98 [1.259]	


TABLE 5		
LEAD	"N"	
STYLE	IN	
-01.5	3.53 [0.139]	
-03.5	5.53 [0.218]	
-06.5	8.53 [0.336]	
-08.5	10.53 [0.415]	

PROPRIETARY NOTE  THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESS. WEESEVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHOREDE PRESSON OR ENTITY NOR	samtec
REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.	520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733
DO NOT SCALE DRAWING	DESCRIPTION: ADM6 ASSEMBLY
SHEET SCALE: 6:1	DWG. NO. ADM6-XXX-XXX-XXX-4-X-X-XR
	BY: J RUZZI 6/14/2016 SHEET 2 OF 4
V	

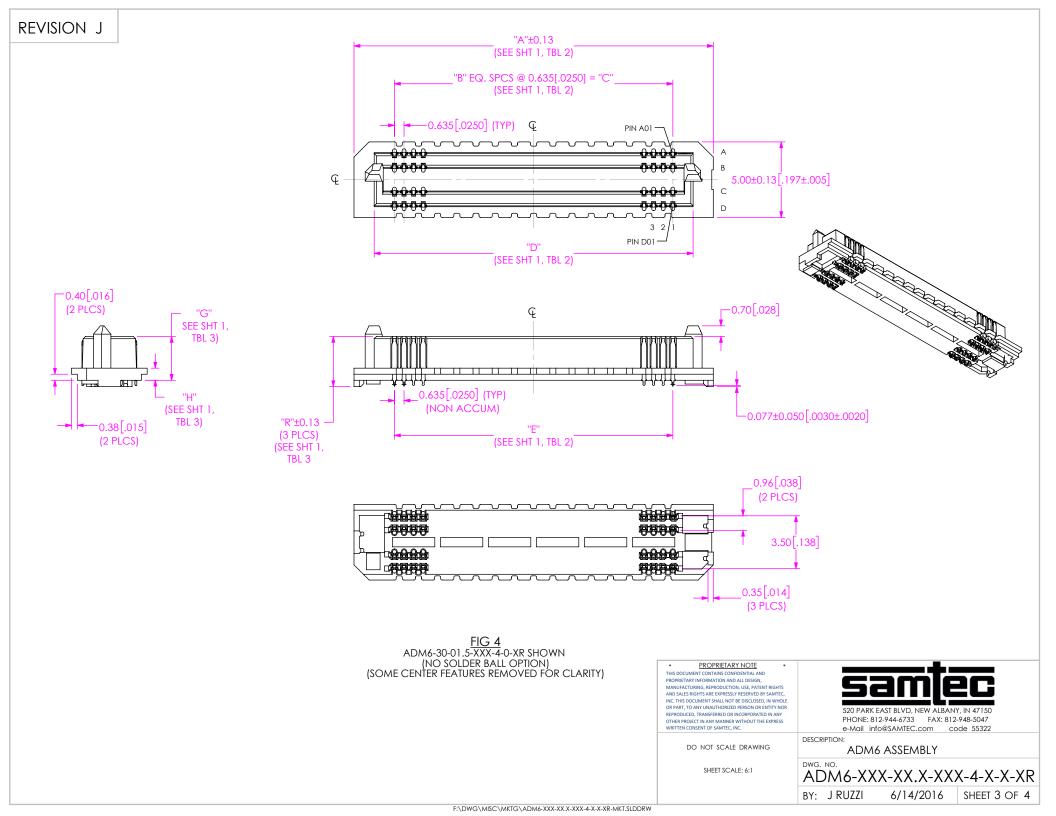

## REVISION J

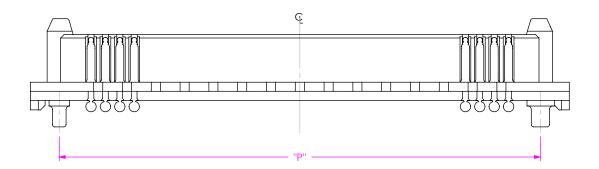



	0.800[.0315]
270[.0500]	
0.600[.0236]	
0.800[.0315]	

TABLE 6		
No OF POS PER ROW	"P"	
-10	8.52 [0.335]	
-20	14.87 [0.585]	
-30	21.22 [0.835]	
-40	27.57 [1.085]	
-50	33.92 [1.335]	
-60	40.27 [1.585]	
-70	46.62 [1.835]	
-80	52.97 [2.085]	
-90	59.32 [2.335]	
-100	65.67 [2.585]	

FIG 3

-A: ALIGNMENT PIN

ADM6-30-01.5-XXX-4-X-A-XR SHOWN
(SAME AS FIG 1, EXCEPT AS SHOWN)
(SOME CENTER FEATURES REMOVED FOR CLARITY)

## THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETER YNFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMITEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR IN INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMITEC, IN

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DO NOT SCALE DRAWING

SHEET SCALE: 4:1

DWG. N

ADM6 ASSEMBLY

DWG. NO.
ADM6-XXX-XX.X-XXX-4-X-XR

BY: J RUZZI

DESCRIPTION:

6/14/2016

SHEET 4 OF 4