
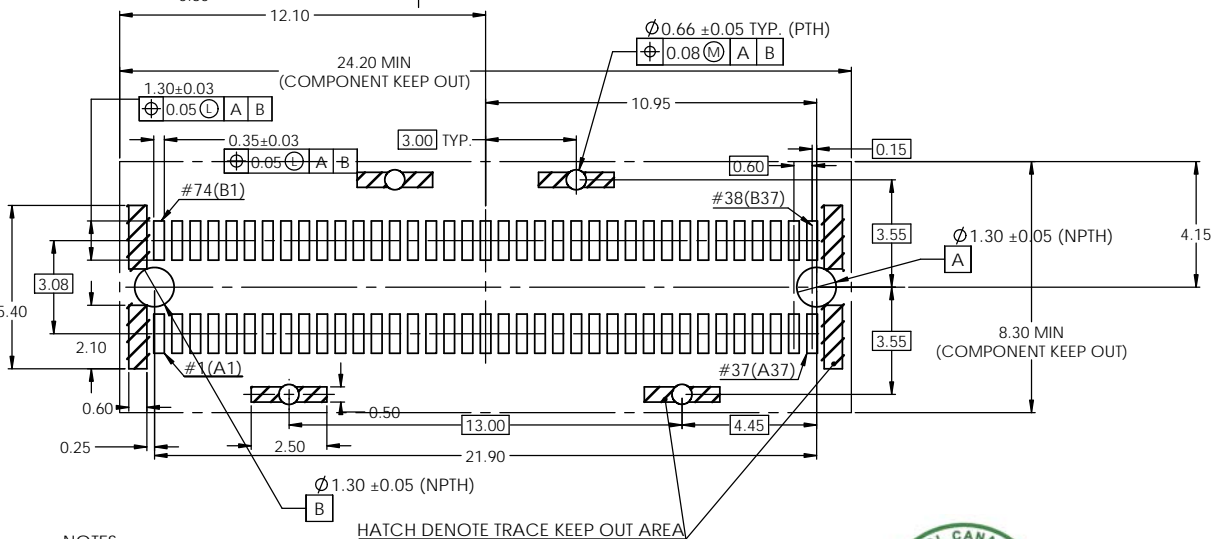
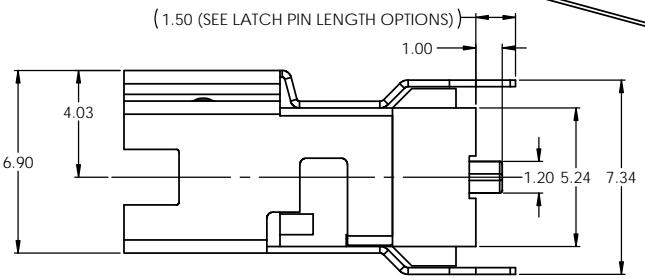
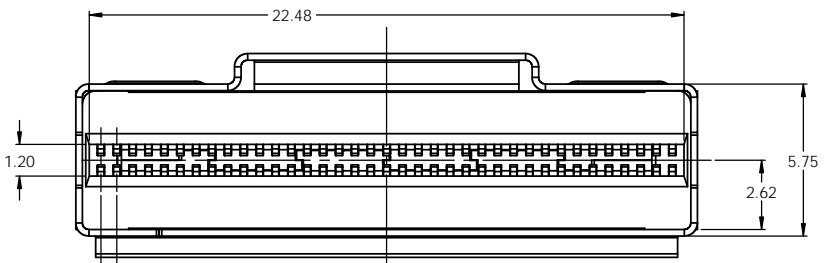
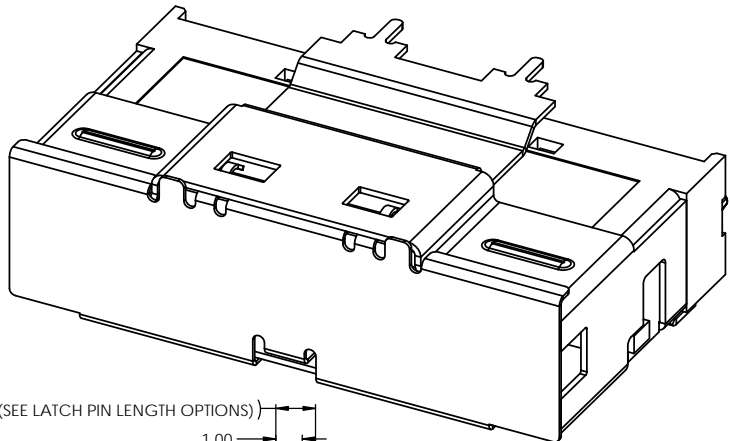


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APPD
A	PROPOSAL	DEC04/13	ZLJ
N	DESIGN CHANGE	JUL06/16	JS

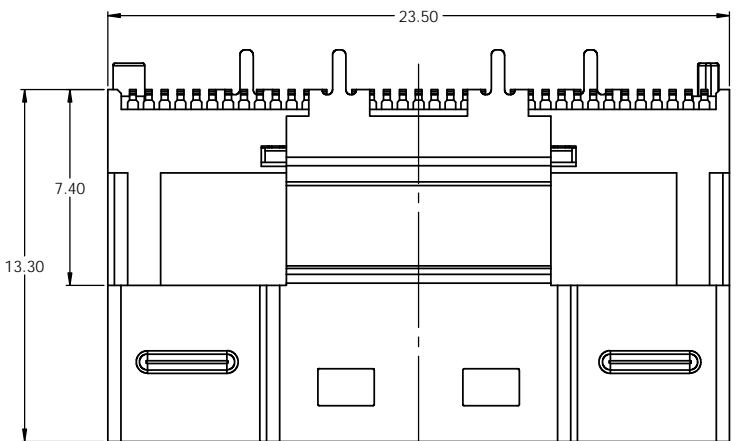

U10 - B074 - X X X X

- OPTIONS**
- 0T** = STANDARD CONSTRUCTION (24G) WITH TAPE & REEL PACKAGING
 - 1T** = NO RESONANCE DAMPING FEATURE (12G) WITH TAPE & REEL PACKAGING
- LATCH PTH PIN LENGTH OPTIONS**
- 0** = 1.50
 - 1** = 2.20
 - 2** = 3.00
 - 3** = 4.20
- CONTACT PLATING OPTIONS**
- 2** = 30 MICROINCHES OF GOLD ON MATING END WITH 100 MICROINCHES MINIMUM OF MATTE TIN ON SOLDER TERMINATION. 50-75 MICROINCHES OF NICKEL UNDERPLATE ALL OVER
 - 3** = 15 MICROINCHES OF GOLD ON MATING END WITH 100 MICROINCHES MINIMUM OF MATTE TIN ON SOLDER TERMINATION. 50-75 MICROINCHES OF NICKEL UNDERPLATE ALL OVER

NOTES:

- MATERIAL:
HOUSING: SOLDER REFLOW PROCESS COMPATIBLE LCP, UL94V-0
CONTACTS AND LATCH: HIGH PERFORMANCE COPPER ALLOY
RESONANCE DAMPENING FEATURE: SEMI-CONDUCTIVE POLYMER
- RoHS COMPLIANT

HATCH DENOTE TRACE KEEP OUT AREA



UNLESS SPECIFIED OTHERWISE	DRAWN	A.ALIM	DEC04/13
PRIMARY UNITS MILLIMETERS	CHECKED	BA P	JUN11/14
SECONDARY INCHES	M.E. APPD		
REFERENCE IN PARENTHESES	Q.A. APPD		
GENERAL TOLERANCES	DWG APPR.	ZLJ	DEC04/13
1 DECIMAL PLACE ±0.2	ENG. REL. NO.	ECN TBD	
2 DECIMAL PLACES ±0.10	REF.		
3 DECIMAL PLACES ±0.050	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1°	DO NOT SCALE DRAWING		

Amphenol High Speed Interconnects
A Division of Amphenol Corp. www.amphenolcanada.com

ULTRAPORT SLIMSAS™ 8X VERTICAL RECEPTACLE WITH LATCH PIN INSIDE – 74 POSITION

DWG. NO.	P-U10-B074-XXXX	REV	N
CODE ID NO.	03554	DWG SIZE:	C
SCALE:	7	SHEET 1 OF 1	