


REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|---------------------------|-----------|-----|------|
| | M | REV PER ECR 07-027142 | 13NOV07 | JR | TM |
| | M1 | REVISED PER ECO-18-011826 | 26JUL2018 | RS | DR |

AMP
WIRE RANGE

16-14 AWG
STRANDED

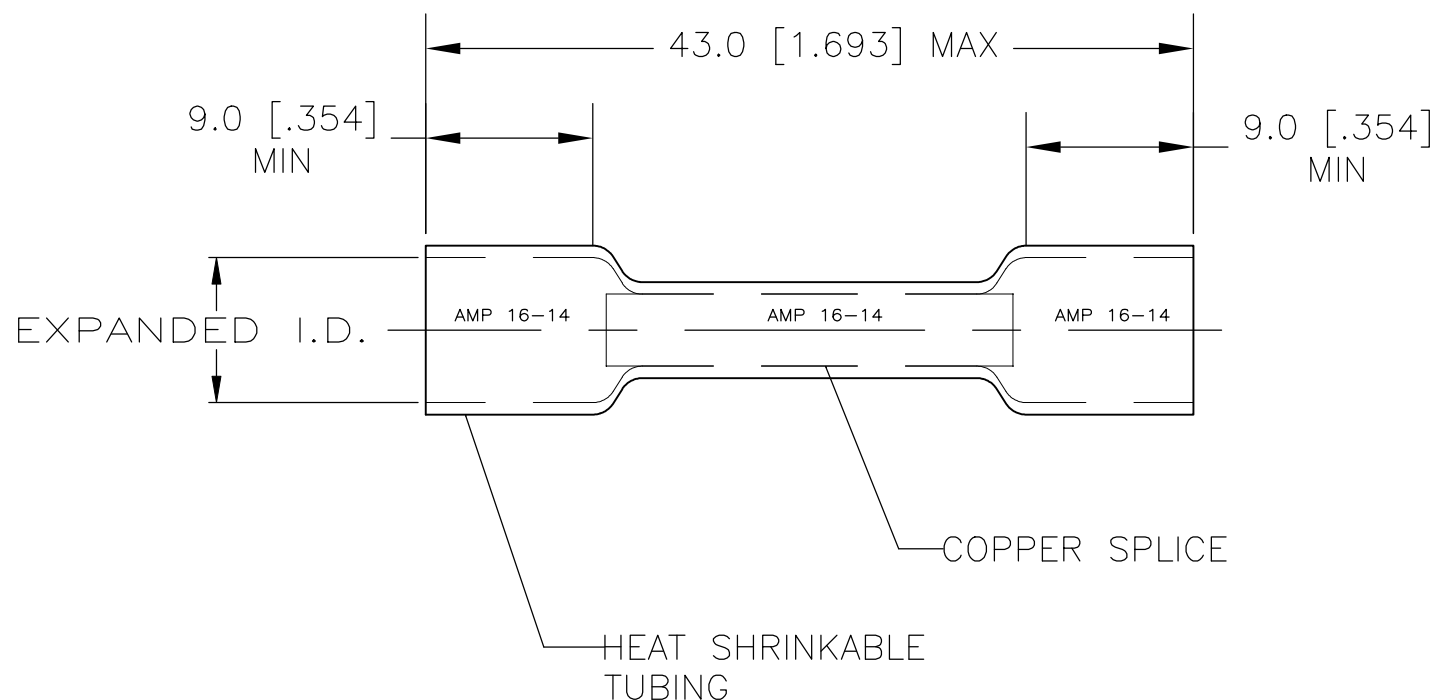

- 1 TUBING MATERIAL; CROSS-LINKED POLYMER WITH MELT LINER; COLOR, BLUE; BLACK INK LEGEND 1/16 MIN; HEIGHT; ONE FULL APPEARANCE MIN.
- 2 TEMP RATING -65°F TO 257°F { -55°C TO 125°C }
- 3 SHIPPING WEIGHT .004 LBS EACH
- 4 VOLTAGE RATING: 600 V MAX (1000 V MAX FIXTURES & SIGNS)
- 5 MATERIAL & FINISH ; BODY - COPPER, TIN PLATED SLEEVE - NYLON

| | | | |
|--------------|-------------------|--------------------|----------|
| 1000 | 5.21 [.205] | 2.16 [.085] | 603503-3 |
| 50/BOX | 5.21 [.205] | 2.16 [.085] | 603503-2 |
| PACKAGE TYPE | EXPANDED I.D. MIN | RECOVERED I.D. MAX | PART NO. |

| | | | | | | | | | | | | | | | | |
|--|---------------|--|---|------------------------|-----|-------|-----|-------|---------------|-------|-----|--------|-----|-------------------|------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN JR RUTH 24JUN04 | STE TE Connectivity Ltd. | | | | | | | | | | | | | |
| DIMENSIONS: mm [INCHES] | | CHK T MICHELUTTI 24JUN04 | | | | | | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD T MICHELUTTI 24JUN04 | NAME PRE-INSULATED SEALED SPLICE WIRE SIZE: 16-14 AWG | | | | | | | | | | | | | |
| <table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± 0.13 [.005]</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table> | | 0 PLC | ± - | 1 PLC | ± - | 2 PLC | ± - | 3 PLC | ± 0.13 [.005] | 4 PLC | ± - | ANGLES | ± - | PRODUCT SPEC - | SIZE A3 | |
| 0 PLC | ± - | | | | | | | | | | | | | | | |
| 1 PLC | ± - | | | | | | | | | | | | | | | |
| 2 PLC | ± - | | | | | | | | | | | | | | | |
| 3 PLC | ± 0.13 [.005] | | | | | | | | | | | | | | | |
| 4 PLC | ± - | | | | | | | | | | | | | | | |
| ANGLES | ± - | | | | | | | | | | | | | | | |
| MATERIAL | | APPLICATION SPEC - | CAGE CODE 00779 | DRAWING NO C-603503 | | | | | | | | | | | | |
| FINISH | | WEIGHT - | RESTRICTED TO - | | | | | | | | | | | | | |
| <div style="text-align: center;">5</div> | | <div style="text-align: center;">5</div> | | SCALE 1:1 | | | | | | | | | | | | |
| CUSTOMER DRAWING | | SHEET 1 OF 1 | | REV M1 | | | | | | | | | | | | |