

	69.30 ±0.38	
0.25	63.50 ±0.25	
12.60 ±0.38 8.36 ±0.25 2.84	55.42	
8 2		
<u> </u>		
l	2.77	
	1.385	
. 1	0°	

69.30 ±0.38	
63.50 ±0.25	
55.42	
• • • • • • • • • • • • • • • • • • • •	

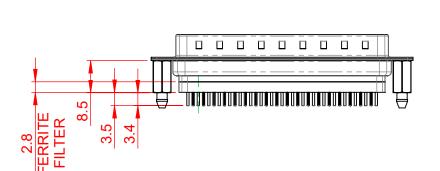





.XXX ±0.10

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER **ORIGINAL** 





## NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C to +105°C

**CURRENT RATING: 3A PER CONTACT** CONTACT RESISTANCE: 25mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

## THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC TORONTO, ONTARIO CANADA

627 SERIES D-SUB CONNECTOR

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 627 ASSEMBLY		
	DRAWN: C.B	DATE: AUG. 01/2018	
	CHECKED:	DATE:	
	SCALE: 1:1	SHEET 1 OF 1	
	DDAMING NUMBER: 627 027 229 266		

DRAWING NUMBER: 627-037-228-266 ISSUE PART NUMBER: 627-037-228-266