





ISSUE NUMBER	
ORIGINAL	

(1)

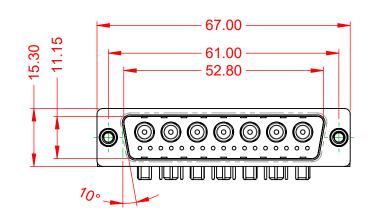




## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDAN
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTA 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

DIELECTRIC


.XX ±0.13 .XXX ±0.05

WITHSTANDING VOLTAGE:

ICE)

ACT

1000V AC rms



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	EDECINC TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-24W7640-5TC		ISSUE
YOUR CONN	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-24W	7640-5TC	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

