
т	۵	п	т	0





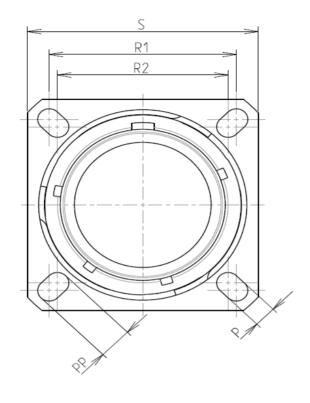

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

7	-Shell Material	: Aluminium			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	-65°C to +200°C			
	-Salt Spray	: 48 hours			
-	-Mass	: 11.86 g ± 10%			

8D 0

G

11

-

F

05

А

F

С


P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26 S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max V THREAD	Dim	Nominal
R1 20.62 R2 18.26 S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max	Р	3.25±0.2
R2 18.26 S 26.2±0.3 V 20.83±0/-1.25 W 2.1/2.5 Z 31.5 Max	PP	4.93±0.2
S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max	R1	20.62
V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max	R2	18.26
W 2.1/2.5 Z 31.5 Max	S	26.2±0.3
Z 31.5 Max	V	20.83+0/-1.25
	W	2.1/2.5
V THREAD M15x1-6g	Z	31.5 Max
11112/12	/V THREAD	M15x1-6g


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-05



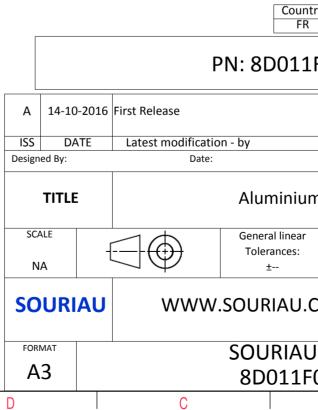

				1	
σ		A			
				4	
AS EXAMPLE				3	
r any non-conformity or damage s which does not comply with er of the Parties or by a third party indation, technical notice.)					
	CUSTOMER		MOD N°		
um Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
J.COM	This document is the property of				
U DRG N° F05AC-C			SHEET 1/2		
B		A		J	

	т	۵	п	т	D	0	
		Contact Layout				Pan	el Cutou
4	×.	$ \begin{array}{c} & & & \\ & $				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta positio ID A B C C D E Shell Arrangement Numb	X-axis Y-axis (mm) +065 (1.65) +056 (1.42) +.113 (2.87) 065 (1.65) +.000 (0.00) 130 (3.30) 112 (2.87) 065 (1.65) 065 (1.65) +.056 (1.42)	1		<u>ج</u>		_
ى ى	size no. conta 11 -5 5					Dim ØA ØAA R1 ØT	
	9					SOURIAU shall not be liabl due to a use of the Proc the Specifications issued by (professional recom	ducts wh either of
N						[Countr FR
					A 14-10	-2016 First Release	011
					ISS DA Designed By:	TE Latest modification - by Date:	
					SCALE	Alum	ninium
-					NA	Tolera ±-	nces:
					SOURI		
		1			FORMAT A3		RIAU)11F(
	Н	G	F	E \	D	C	

