

т	۵	п	m	0



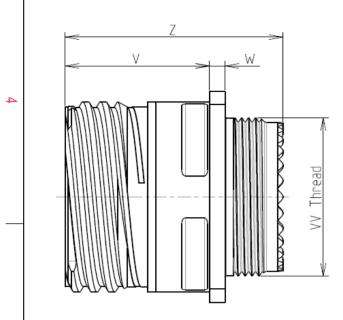

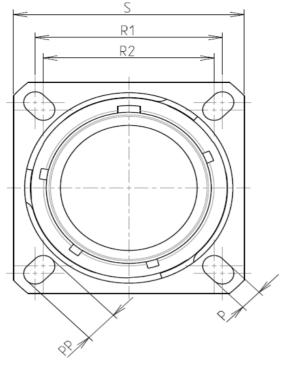

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 25

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minir			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

: 80.39 g ± 10%

8D 0

G

	r dimension
Dim	Nominal
Р	3.91±0.2
PP	6.15±0.2
R1	38.1
R2	34.93
S	46±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M37x1-6g

п	m	C	J		0		σ	A		1
<	S R1 R2 I I I I I I I I I I I I I I I I I I									4
Keying Shown as example			LAYOUT SHOWN AS EXAMPLE						3	
Connector dimension Dim Nominal P 3.91±0.2 PP 6.15±0.2 R1 38.1 R2 34.93 S 46±0.3 V 20.07+0/-1.25 W 2.1/3.2 Z 31.5 Max VV THREAD M37x1-6g		.25		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control Lis FR Not Listed PN: 8D025Z29SB			nply with y a third party tice.) ction & Control List		2	
		-	ISS Designe	DATE	First Release Latest modificatio Date:		Recentacle	CUSTOMER DRAWING	MOD N°	-
25 Z 29 S B	CONTACT TYPE : SOCKET(!				₩ww.	General linear Tolerances: ± SOURIAU.C		NPRDS / PROJECT 859 This document is the pro SOURIAU it must not be reproduc communicated without pe	ced or	1
F	E		A3		С	8D025Z2		A	1/2	

