
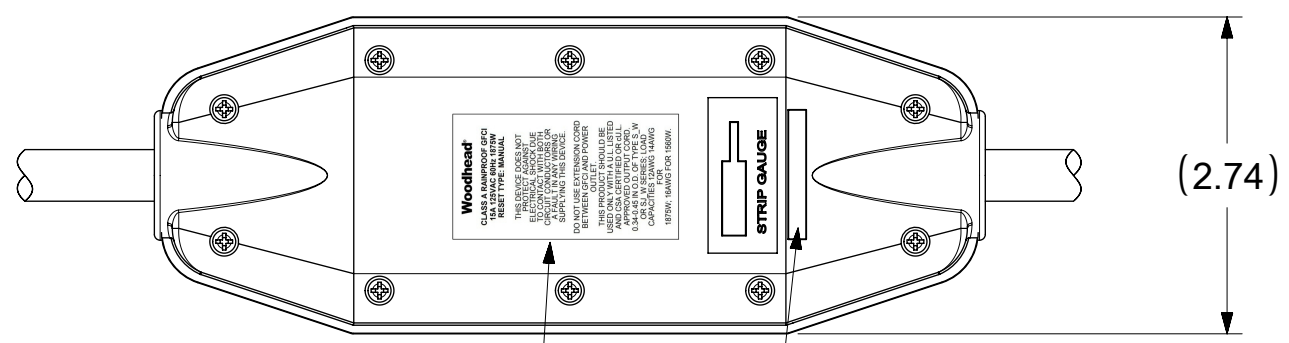


AWG: #12-3 YELLOW  
 TYPE: SJTOW, 300V  
 AGENCY APPROVAL: UL & CSA CERTIFIED OR cUL  
 (BOTH SIDE - PRIMARY & SECONDARY)

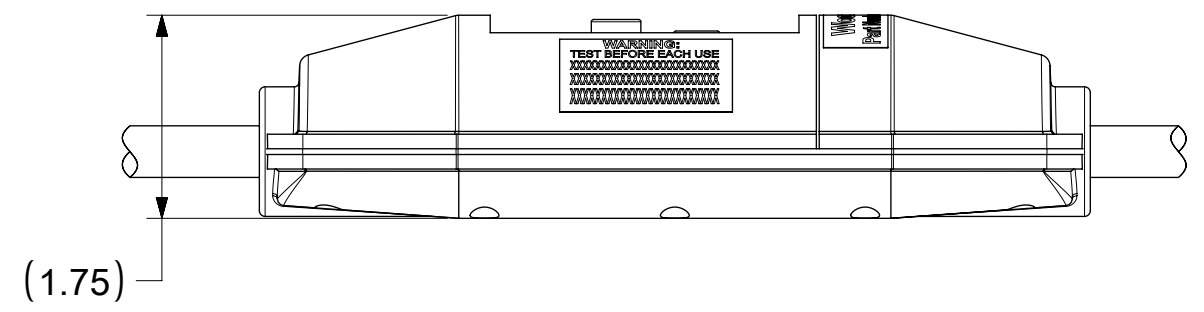

WOODHEAD DRESS LABEL

**TECHNICAL**

LISTED: UL & CSA  
 RATED SUPPLY VOLTAGE: 120VAC  
 RATED CURRENT: UP TO 15 AMPS  
 RESET TYPE: AUTO OR MANUAL  
 OPERATING FREQUENCY: 60 Hz  
 TYPE: CLASS A  
 GROUND TRIP CURRENT: 5mA +/- 1mA  
 OVERLOAD CURRENT: 90 AMPS, 0.45 PF  
 INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE  
 ENDURANCE OPERATIONS: 3000 OPERATIONS  
 ENCLOSURE: NEMA 3R

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	POWER-UP
1301530267	15051-0M	2.5 FT	MANUAL

<b>FUNCTIONAL SYMBOLS</b> $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_P = 0$ <b>DIVISIONAL SYMBOLS</b>	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: NEW SALES DRAWING CREATED		<p>SUPER-SAFEWAY GFCI 15A, 120V FLYING LEADS #12-3 SJTOW CABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>				
	DIMENSION UNITS	SCALE	EC NO: 679783						
	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRWN: VBASUTHKARP	2021/10/05					
	ANGULAR TOL ± 0.5°		CHK'D: DNGUYEN62	2021/10/05					
4 PLACES ±		APPR: HKNEELAND	2021/10/11						
3 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION		
2 PLACES ±		DRWN: HRUIZ01	2014/04/28	SD-130153-043		PSD	001	B	
1 PLACE ±		APPR: JFMURPHY	2014/08/07	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER			
0 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES			
					C-SIZE	130153	SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2021/10/11 17:53:57
-----------------	----	--------------	---------------------