




.XXX ±0.05

_	IS
\square	ORIGINAL



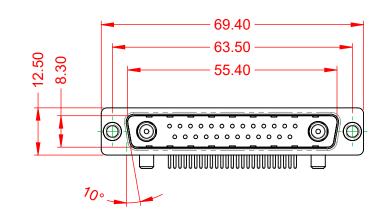




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING:	40A (CURRENT
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTA
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

Г)

-55°C ~ 125°C

ACT

1000V AC rms



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19	
			DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-27W2640-4N1		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-27W2	2640-4N1	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

