

<b>T</b>	G	П	m	0



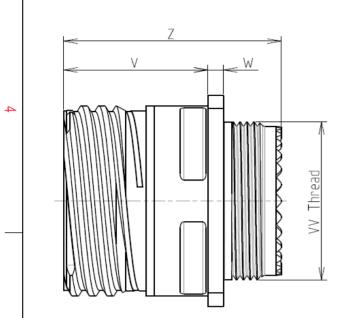

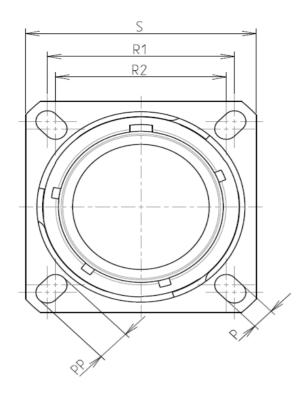

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 09

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 500 hours -Salt Spray

: 23.93 g ± 10%

8D 0

G

09

S

98

А

F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	5.49±0.2		
R1	18.26		
R2	15.09		
S	23.8±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M12x1-6g		


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 09-98

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

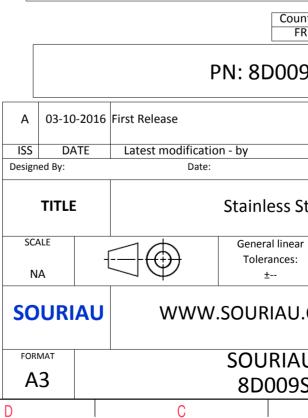

	Φ		A		
					4
AS EXA	AMPLE				3
s whic er of t ndatio untry FR	non-conformit th does not co he Parties or to n, technical no Jurisd	mply with by a third par	ty		2
		CUSTOME	R DRAWING	MOD N°	
Steel Receptacle 8D series					
ar :			/ PROJECT <b>59</b>		
I.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1
	DRG N° 8AC-C			SHEET	
550	BAC-C		A	,	J
	-	•			

,	Ξ	۵	<del>ات</del>	m		0	
		Contact Layout					Panel Cutou
4	-X					SQUARE FLANGE RECEPTACLE (TYPE OR REAR MOUNTING	
	Shell Arrangement Numb conta 9 -98 3	X-axis (mm) Y-axis (mm)   + 065 (1.65) + 0.38 (0.97)   + 000 (0.00) - 0.75 (1.91)   - 0.65 (1.65) + 0.38 (0.97)					ØT
ω						لم م ا	im 5A AA 21 5T
	<b> </b>						
						SOURIAU shall not be due to a use of the the Specifications issue (professional r	e Products when our of the products when our output of the products when output of the pro
N						PN:	FR 8D0095
					A 03-10-20	116 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	У
					TITLE		ainless Ste
<u> </u>					SCALE NA		eneral linear Tolerances: ±
					SOURIA	U WWW.SO	URIAU.C
				_	FORMAT A3		DURIAU 3D009S
	Н	G	F	E	D	C	

