

т	۵	וד	п	0



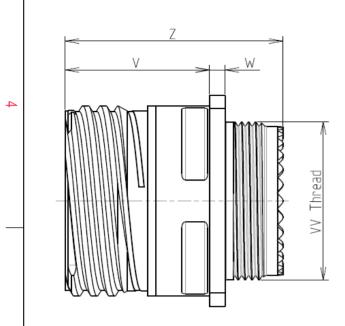

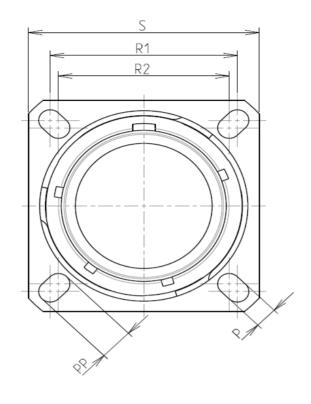

LAYOUT SHOWN AS

Keying Shown as example

Connector dimension

Е

D

Dim

Nominal

CHARACTERISTICS

Н

ω

2


-Standard : Based on MIL-DTL-38999 Series III

\square		: Aluminium				Р	3.25±0.2	
						PP	4.93±0.2	
	-Shell Plating	: Nickel				R1	20.62	
	-Insulator	: Thermoplastic				R2	18.26	
	-Contacts	: Copper Alloy				S	26.2±0.3	
	-Seals & Grommet	: Silicon Elastomer				V W	20.83+0/-1.25 2.1/2.5	
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum				Z	31.5 Max	
	-Durability	: 500 Mating cycles				VV THREAD	M15x1-6g	
	-Delivered without So							
	-Temperature Range	-65°C to +200°C						
	-Salt Spray	: 48 hours						
	-Mass	: 11.02 g ± 10%						
			ı					
	BASIC SERIES:	8D 0 - 11 F	02	Р	N	L		
	→ SHELL TYPE : Square Flange Receptacle					Delivered W/O Contacts		
	CONTACT TYPE : Sta	ndard Crimp Contact					ORIENTA	HON : N
	SHELL SIZE : 11					COI	NTACT TYPE : PIN(500 N	√atings)
	PLATING : F =	Nickel					CONTACT LAYOUT	Г:11-02

F

G

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

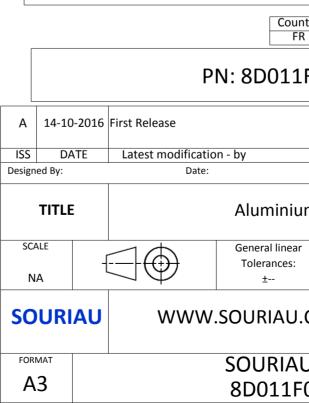

С

	ω		А		_		
A	Re				4		
	AMPLE				3		
ranyı	non-conformit :h does not co						
er of t ndatio	ar of the Parties or by a third party dation, technical notice.)						
untry FR	Jurisd	iction & Cont Not Listed	trol List		2		
1F0	2PNL						
		CUSTOME		MOD N°			
um	m Receptacle 8D series						
ar :	NPRDS / PROJECT						
			59	ortu of	1		
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	U DRG N° SHEET						
F02	PNL-C		Α	1/2	J		
	В		А				

ſ	工	۵	וד	m	D	0
		Contact Layout				Panel Cutou
4	.X (2)	+Y B A +Y +X +X 95 (2.41mm)			Σ -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Cont posit ID A B Shell Arrangement size no. 11 -2	X-axis (mm) Y-axis (mm) +.095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00) Number of Size Service Con	ntact ation		V	Dim
ى ى						ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
C						PN: 8D011F
					A 14-10-201 ISS DATE Designed By:	6 First Release Latest modification - by Date:
→					SCALE NA	General linear Tolerances: ±
					FORMAT	J WWW.SOURIAU.C SOURIAU
	Н	G	F	E	A3	8D011F0
				N N	V	

