
т (С. 1997) Политика	m		0	œ	Þ	
	g Shown as example		LAYOUT SHOWN	AS EXAMPLE		
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer	Connector dimensionDimNominalØS25 MaxZ'31.5 MaxVV THREADM15x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
 -Contact Plating : Gold over copper Alloy 0.8μm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C 65°C to +200°C 		A 16-10-2016	FR Not Listed PN: 8D511M01SC A 16-10-2016 First Release			
-Salt Spray : 2000 hours 		ISS DATE Designed By:	Latest modification - by Date:	CUSTO	MO DMER DRAWING	D N°
		TITLE	TITLE Compos		ite Plug 8D series	
BASIC SERIES: 8D 5 - 11 M 01 S SHELL TYPE : Plug with RFI Shielding .	c	SCALE NA	General lir Tolerance ±	25:	RDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : SOCKET(500 Matings)			SOURIAU This document is the property of SOURIAU it must not be reproduced or communicated without permission			
PLATING : M = Nickel	CONTACT LAYOUT : 11-01	FORMAT A3		AU DRG N° 1M01SC-C		IEET L/2
H G F	E	D	C	B	Α	

_	т	G	וד	т	U	0
		Contact Layout				
4		01				
_	(1#12 11-01	٦			
ω	Ctc A	X Y 0 0	-			
	_					SOURIAU shall not be liable for any
N						due to a use of the Products wh the Specifications issued by either of (professional recommendat Countr FR
					A 16-10-20	PN: 8D511N
					ISS DATE Designed By: TITLE	Latest modification - by Date: Compo
					SCALE NA SOURIA	J WWW.SOURIAU.C
	Н	G	F	E	FORMAT A3 D	SOURIAU 8D511M C

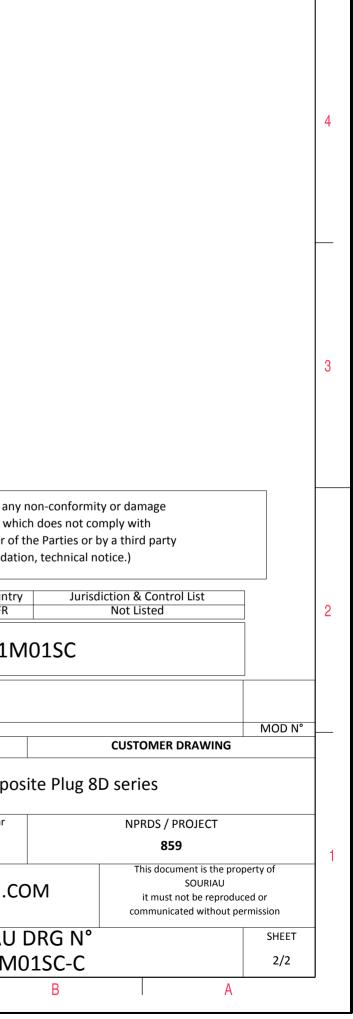

 \triangleright

σ