



### Electrical specifications

**Center Frequency:** 1260 MHz  
**Bandwidth:** 21 MHz  
**VSWR in BW:** 1.5 : 1 min  
**Insertion Loss (BW):** 3.0 dB max  
**Ripple in (BW):** 1.0 dB max  
**Input / Output Impedance:** 50 Ohms  
**Rejection:** 50dB min at 1100MHz  
**Rejection 2:** 20dB min at 1230MHz  
**Rejection 3:** 20dB min at 1291MHz  
**Rejection 4:** 50dB min at 1530~1551MHz  
**Rejection 5:** 50dB min at 1800MHz  
**Power Handling:** 3 watt

### Mechanical


**Mounting Method:** SMT  
**Dimensions:** 32 x 17 x 7.5 mm

### Environmental

**Operating Temperature:** -20 C to 70 C  
**Storage Temperature:** -55 C to +85 C

**This product is RoHs compliant.**

### Outline Drawing:

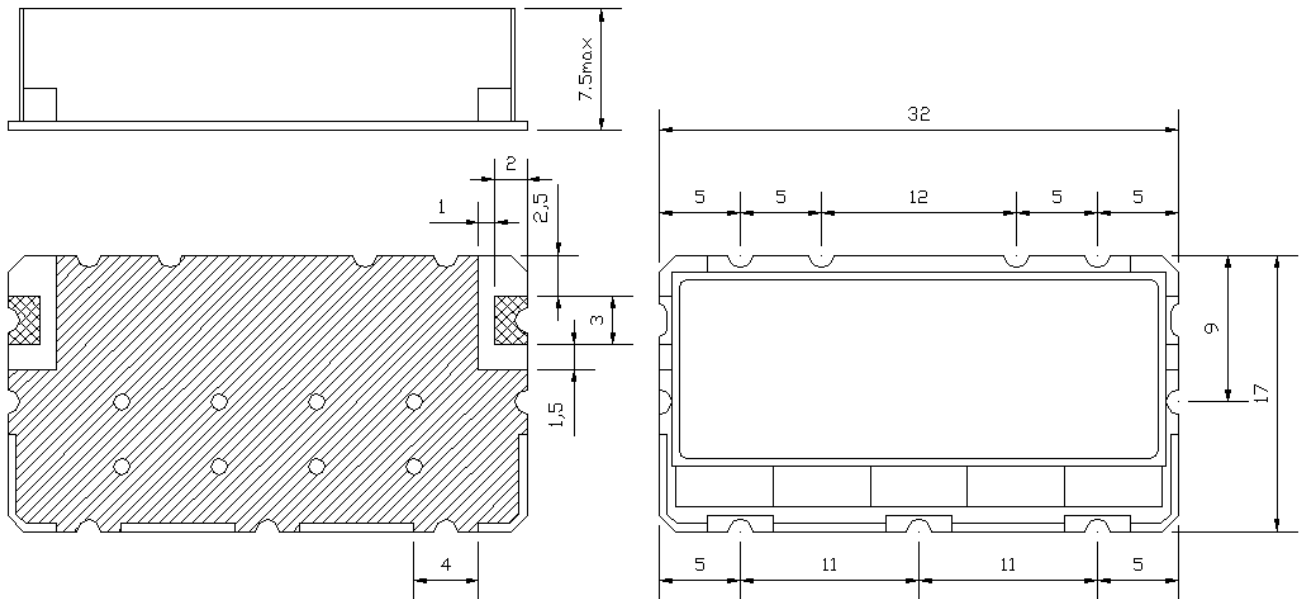

Unit:mm  
Tolerance:±0,3



### Response Plot:





### Land Pattern:

