


т	Q	н — — — — — — — — — — — — — — — — — — —	m	0

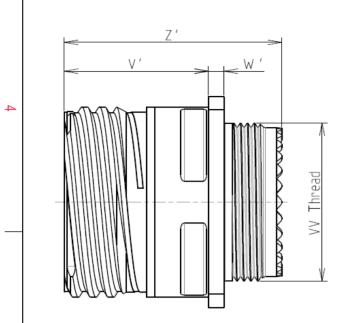

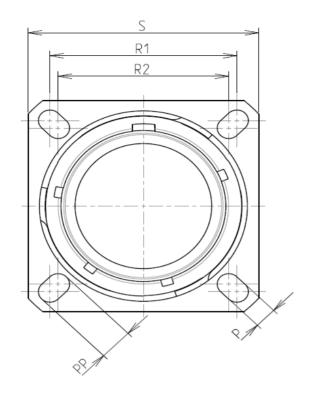



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8μm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65°C to +200°C			
-Salt Spray	: 2000 hours			

8D 0

G

17

Μ

22

Ρ

F

A L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Z'	32 Max		
VV THREAD	M25x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 17-22

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : A



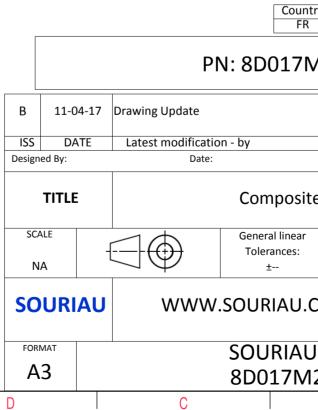

	Ξ		A			
A					4	
S EX4	AMPLE				3	
whic er of t	non-conformit ch does not co che Parties or b on, technical no	mply with by a third par	ty			
intry R	Jurisdiction & Control List Not Listed					
M22PAL						
		CUSTOME		MOD N°		
ite	ite Receptacle 8D series					
ar	NPRDS / PROJECT					
	859 This document is the property of					
J.COM it must not be reproduced or communicated without permission						
	DRG N°			SHEET		
M 2	2PAL-C	I	_	1/2	J	
	В	I	А			

-	Ŧ	G	г П	m	D	0		
4		Contact Layout				Panel Cuto SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING		
	Ctc A B	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0				Max. thickness panel for receptacle: Ty		
ω	C D	0 -4.57 -6.32 0				Dim ØA ØAA R1 ØT		
	-					SOURIAU shall not be li due to a use of the P the Specifications issued l (professional rec	Products v by either	
N						PN: 80	Cour FF	
							mposi	
-					SCALE NA SOUI	Gene Tol	eral linear lerances: ±	
	Н	G	F	E	FORMAT A3 D	SOU	URIAU 017M	
				\backslash	V			

