


_	т <u></u> О т	m		0	σ	A		_
4	R 22.6 Max 9 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	S		<image/> <section-header></section-header>	WN AS EXAMPLE			4
2	CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered without Sourium contacts -Temperature Range : -65°C to +200°C -Salt Spray : 48 hours -Mass : 35.04 g ± 10%	wn as example <u>Connector dimension</u> <u>Dim Nominal</u> <u>A 44.5±0.3</u> <u>B 30.15+0.1/-0.15</u> <u>R 32.5Max</u> <u>S 41.3±0.4</u> <u>W 2.2+0.9/-0.1</u> <u>VV THREAD M25x1-6g</u>	A 30-09-201 ISS DATE Designed By:	the Specifications issued by (professional recon	ducts which does not comeither of the Parties or by the mendation, technical not country Jurisdic FR JURISCHER	ply with a third party	MOD N°	2
	BASIC SERIES: 8D 7 - 17 F 06 P A SHELL TYPE : Jam nut Receptacle	L Delivered W/O Conta ORIENTATION CONTACT TYPE : PIN(500 Matin CONTACT LAYOUT : 17 E	N : A (ngs)	Genera Tolera ± WWW.SOUR SOUI	inces: 	e 8D series NPRDS / PROJECT 859 This document is the prop SOURIAU it must not be reproduc communicated without per	ed or	1

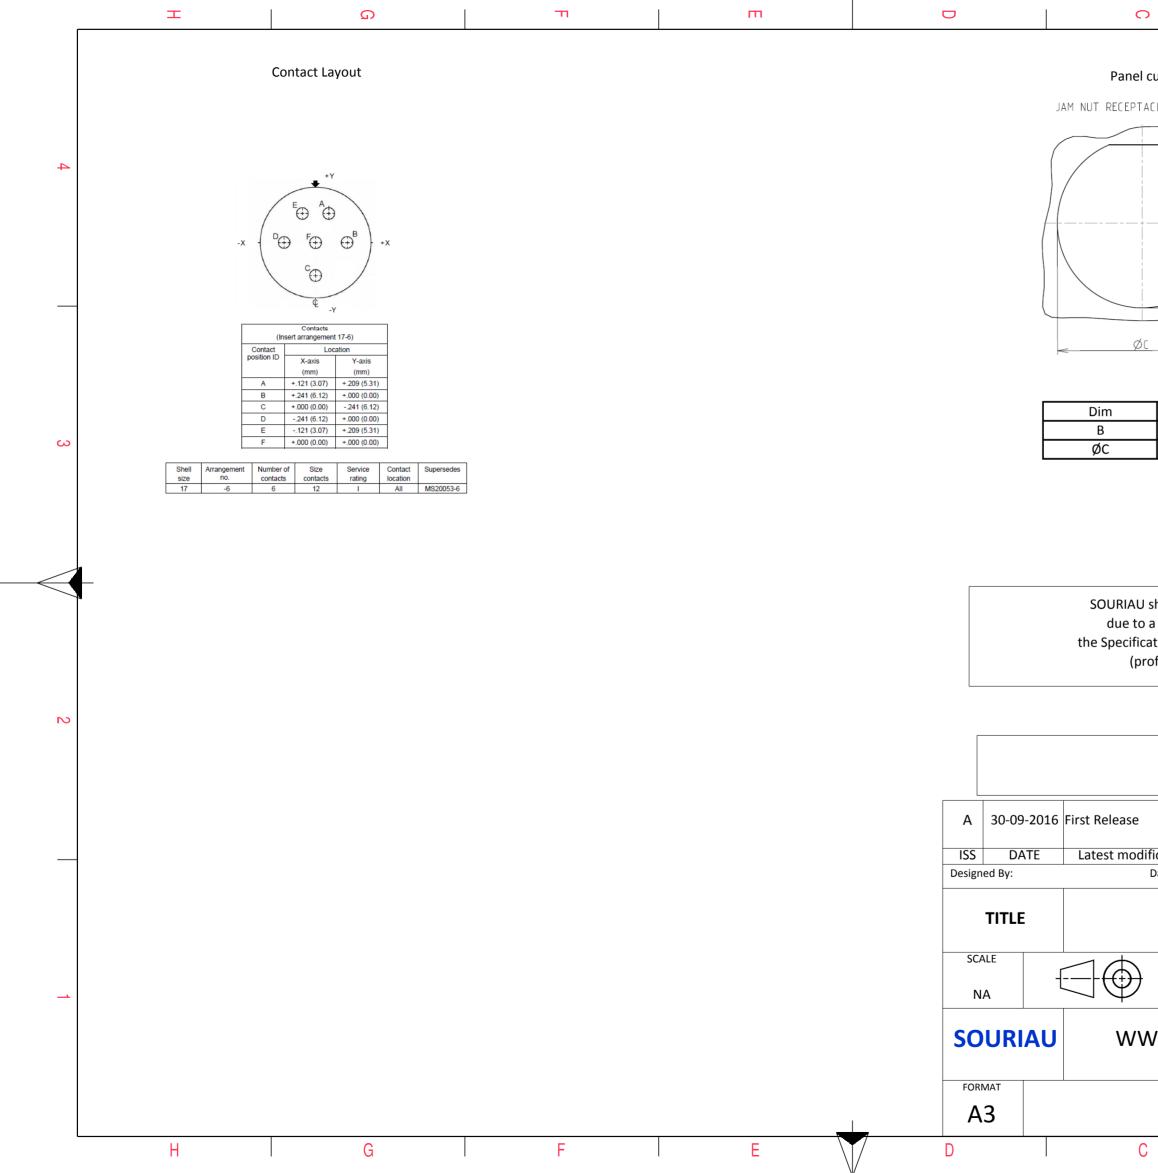

0		σ		А					
l cutou	t								
FACLE (T	YPE 7)								
					4				
 +)								
	V V								
δ <u>ς</u>	~~~~								
	Nominal								
	0.73+0/-0.25				3				
J shall r	not be liable for a	iny non-conformit	ty or damage						
		which does not co of the Parties or b							
		ation, technical n							
	Coun	try lurisd	iction & Contro	llist					
	FR		Not Listed		2				
PN: 8D717F06PAL									
•									
dificatio	on - by			MOI	D N°				
Date:			CUSTOMER I	DRAWING					
	Aluminiu	m Receptac	le 8D serie	S					
•	General linear		NPRDS / P	ROJECT					
ţ	Tolerances: ±		859		1				
\\/\\/	SOURIALI			nent is the property of SOURIAU					
WW.SOURIAU.COM it must not be reproduced or communicated without permission									
	SOURIA	J DRG N°		SHE	ET				
	8D717F	06PAL-C		2/	2				
С		В		А					