

NOTES:


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


.XX ±0.13

.XXX ±0.05

 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact_resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Ac rms} \\ \mbox{Insulator resistance: 5000V AC rms} \\ \mbox{$




		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19	
			DATE:		
EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
		DRAWING NUMBER: 630-2W2-240-5NB		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-2W2-	-240-5NB	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

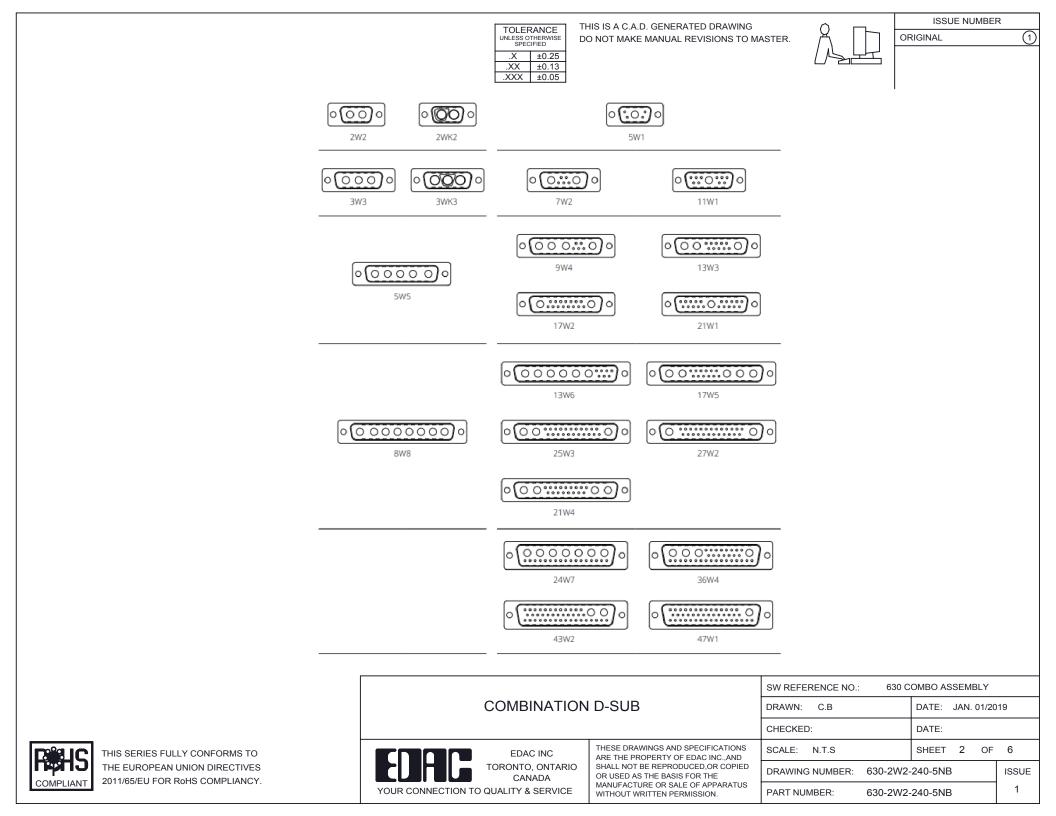



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female





ISSUE NUMBER

ORIGINAL

 $\overline{(1)}$

5W5 Male



PCB EDGE

8W8 Male



PCB EDGE




PCB EDGE

2.77



21W4 Male/Female




PCB EDGE

21W1 Male/Female





	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20)19	
			CHECKED:	DATE:	DATE:	
EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	SCALE: N.T.S	SHEET 3 OF	4		
		DRAWING NUMBER: 630-2W2-240-5NB		ISSUE		
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-2	W2-240-5NB	1	

5W5 Female




8W8 Female







CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.







17W2 Male/Female

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





 .X
 ±0.25

 .XX
 ±0.13

 .XXX
 ±0.05

9W4 Female



31.75

32.00

15.50

2.77

PCB EDGE

21.9

PCB EDGE

36W4 Female



13W6 Male





0.50

2.77

22,16

20.78

20.70

13.72

PCB EDGE



24.77

23.36

43W2 Female





17W5 Male










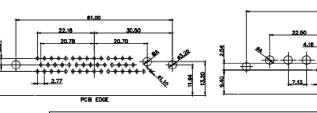

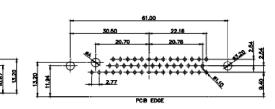

			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER: 630-2W2-240-5NB		ISSUE
			PART NUMBER: 630-2W2	-240-5NB	1