

<b>–</b>	ц <b>т</b>		



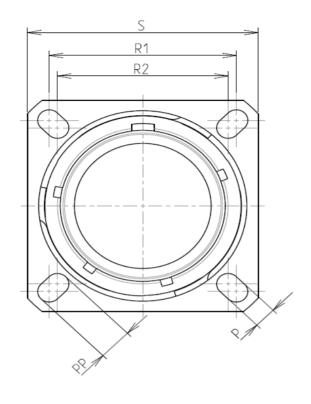



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
2	-Contact Plating	: Gold over copper Alloy 0.8μm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	<ul> <li>-65°C to +200°C</li> </ul>
	-Salt Spray	: 48 hours
	-Mass	: 12.01 g ± 10%

8D 0

G

11

-

F

01

Ρ

F

С


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-01



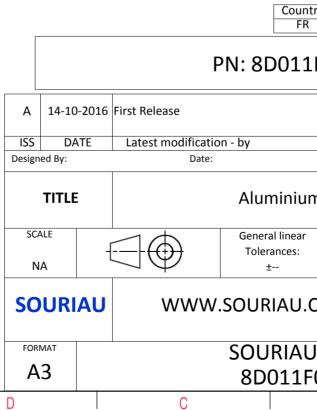

σ		Þ		
				4
AS EXAMPLE				3
any non-conformin which does not co or of the Parties or I adation, technical n untry Jurisc R .1F01PC	mply with by a third part			2
			MOD N°	
um Receptac	CUSTOMER DRAWING Receptacle 8D series NPRDS / PROJECT 859 This document is the property of SOURIAU it must not be reproduced or communicated without permission			
U DRG N° F01PC-C		Α	SHEET 1/2	
5	1	11		

		۵	г т	m		0
		Contact Layout				Panel Cutout
4		01			<u>^</u>	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01	1		۲ ۲	
ى	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
2						(professional recommendati Country FR PN: 8D011F
					A 14-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT A3	U WWW.SOURIAU.CO SOURIAU 8D011F0
·	Н	G	F	E	D	С

